
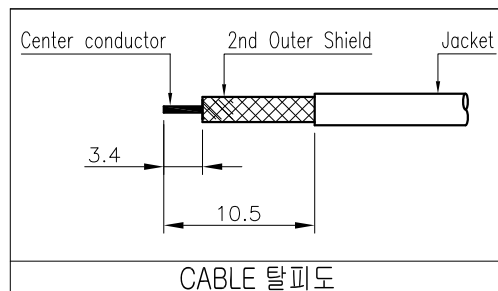


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2021.04.21.

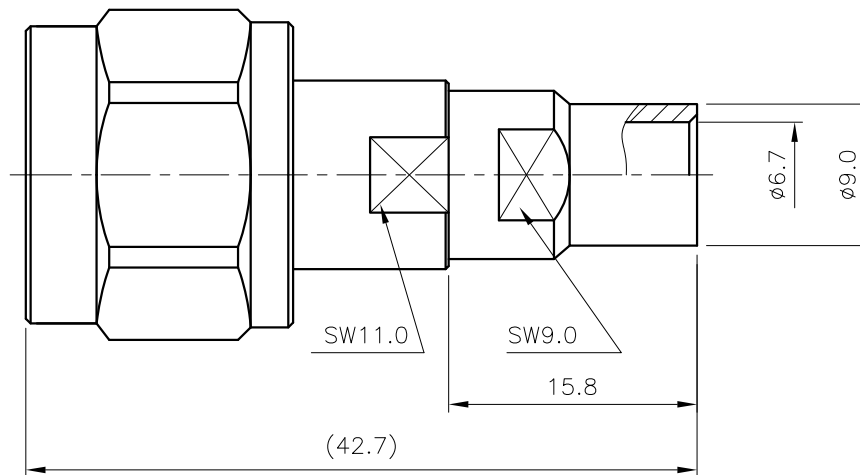

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : -40°C ~ +85°C

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm

2. FREQUENCY RANGE : DC~8GHz

3. VSWR (Max) : 1.3

8	C-RING	1	PBR	Nickel Plate	DSR00020-5/1
7	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00063-5/3
6	INSERT	1	MBsBD C3604BD-F	Gold Plate	DIS00338-5/1
5	BACK NUT	1	MBsBD C3604BD-F	Nickel Plate	DBN00223-5/1
4	INSULATOR	1	TEFLON		DIN03214-N/1
3	GASKET	1	SILICONE RUB		DGK00013-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04207-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04718-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2021. 04. 21.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY				
MATERIAL _____		CHECKED BY			TITLE N50 CABLE PS EXLH-21R	
		DRAWN BY	I.C.KIM			
FINISH _____		SCALE 2/1	UNIT mm		A4	DWG NO. CN03976-7/1
						REVISION I R