

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	


Un mate

ELECTRICAL DATA




1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~11GHz
3. VSWR (Max) : 1.2

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.04.05.

1/4-36 UNS-2A

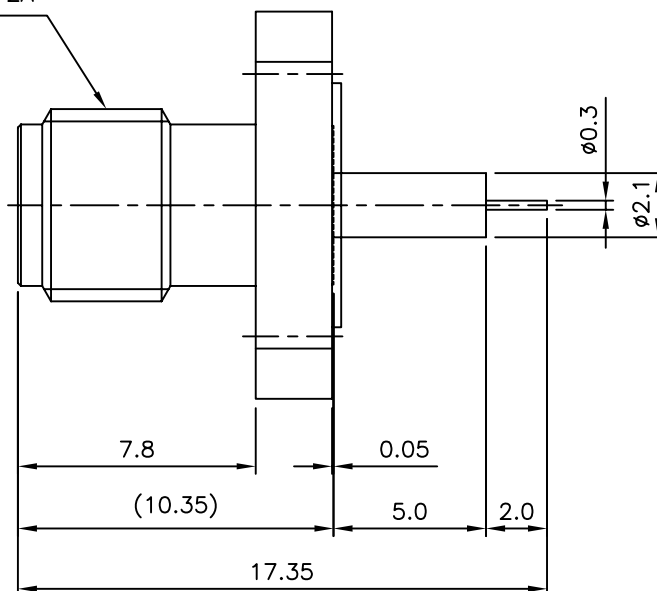

4- ϕ 2.6 THRU

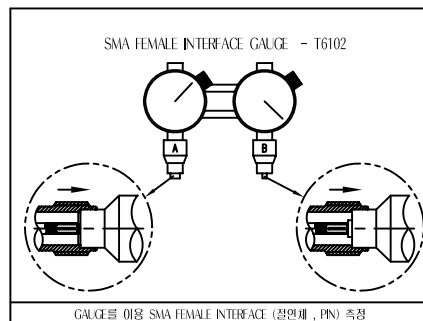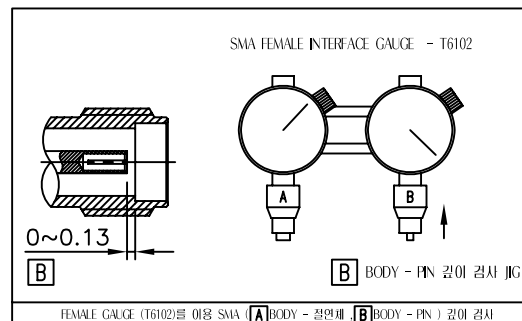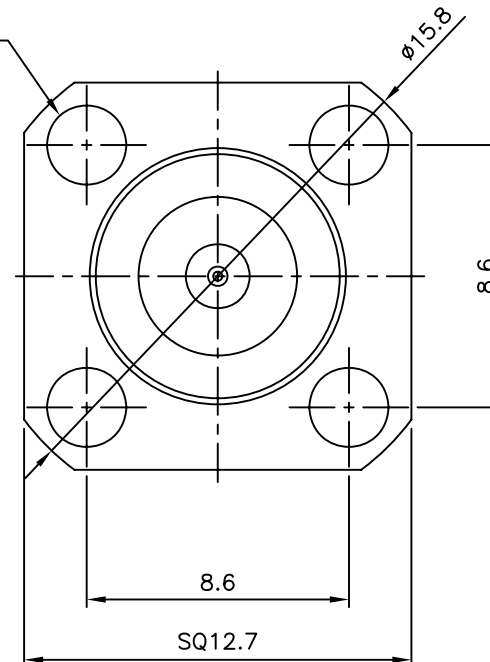

** PIN 높이 검사 방법 **

4	EMI GASKET	1	Carbon		DGK00251-N/1
3	INSULATOR	1	TEFLON		DIN03211-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT04203-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04713-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 04. 05.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE 2.92mm SOLDER END JS-4H
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	4/1	DWG NO. CN03982-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	