
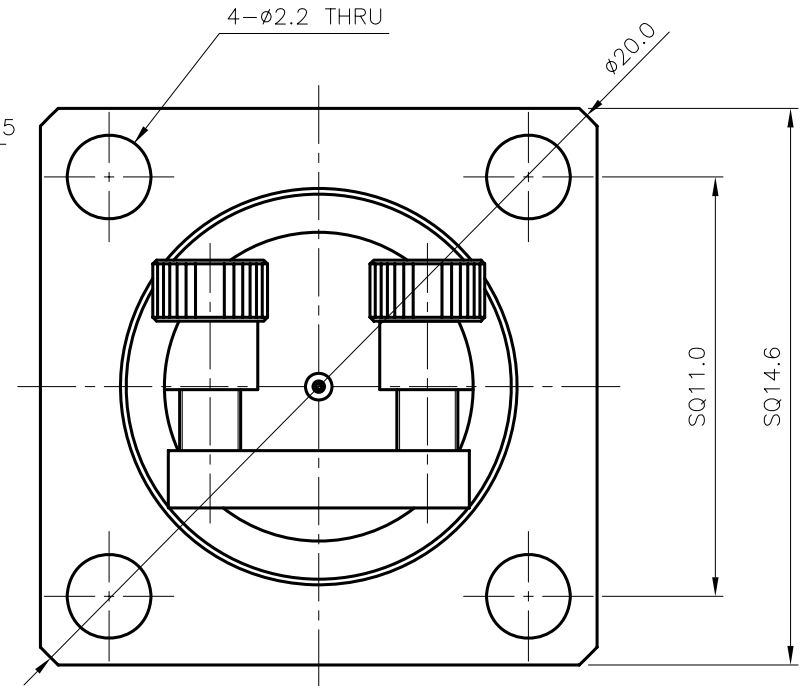


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2021.04.06.

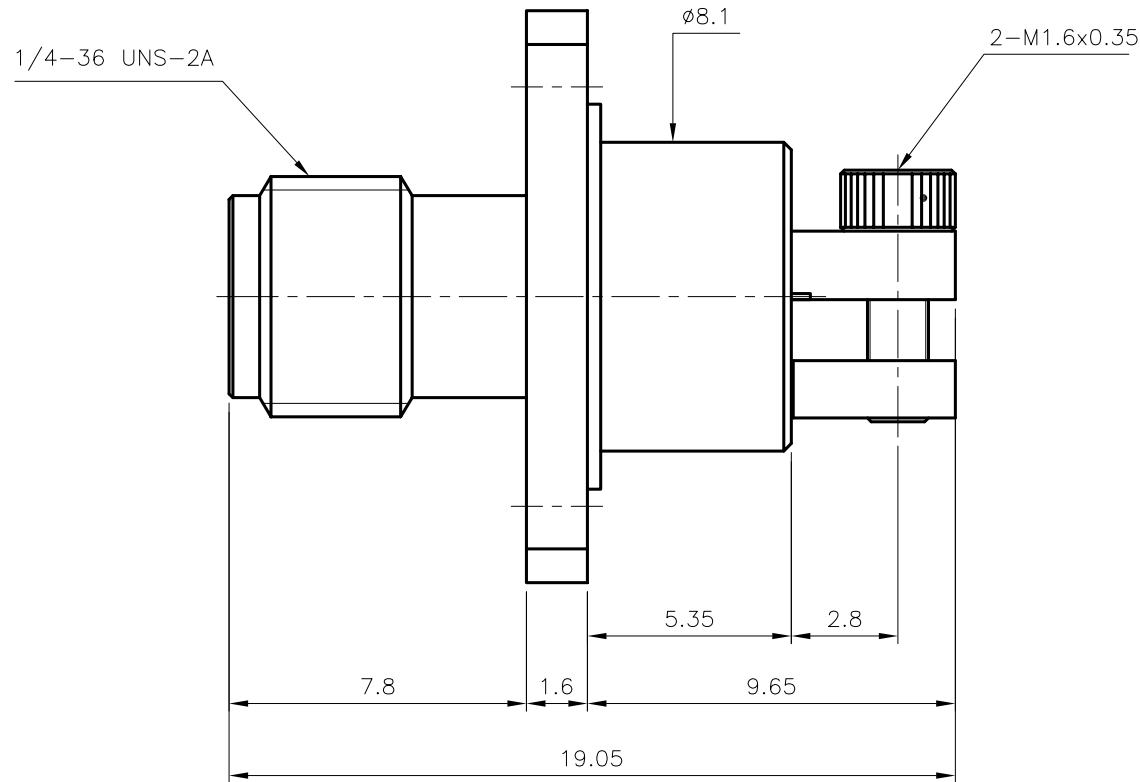

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.2

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

7	육각볼트	2	SUS	Passivate	DBT01113-N/1
6	BRACKET	1	SUS	Passivate	DBR00191-5/1
5	INSERT	1	SUS	Passivate	DIS00283-5/G
4	INSULATOR	1	PEEK		DIN02942-N/C
3	EMI GASKET	1	Carbon		DGK00263-N/1
2	CONTACT	1	BeCu C17300	Gold Plate (1.3μm)	DCT04204-5/1
1	BODY	1	SUS	Passivated	DBD04714-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 04. 06.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY		
MATERIAL	±1°	CHECKED BY		KJ COMTECH CO.,LTD. TITLE 2.92mm SOLDER END JS-4H-2R
		DRAWN BY	I.C.KIM	
FINISH		SCALE	5/1	DWG NO. CN03983-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	

A4