
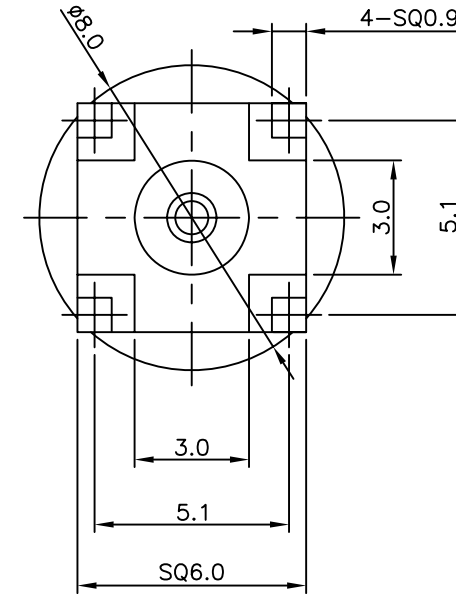


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.11.26.

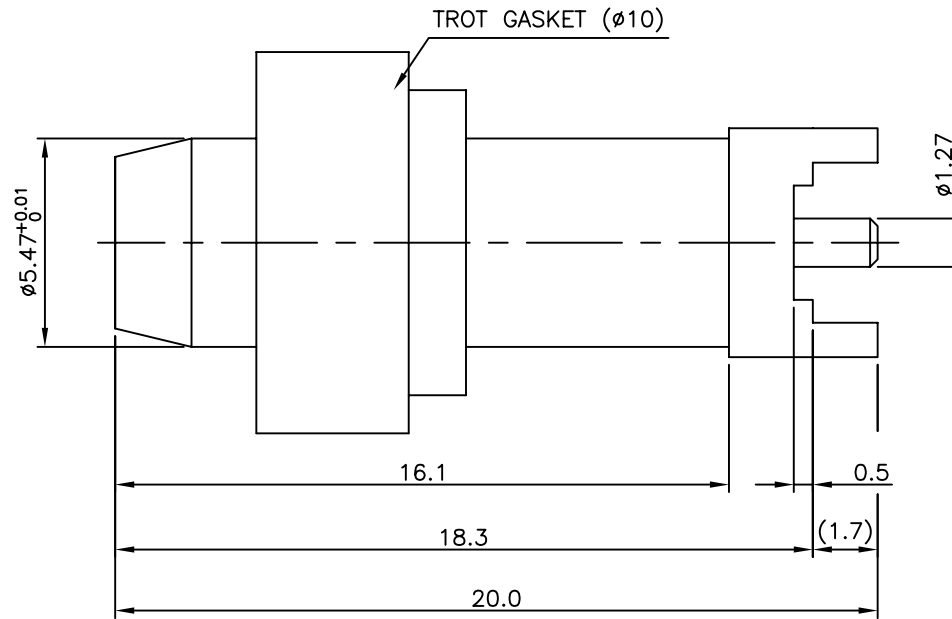


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. DIELECTRIC WITHSTANDING VOLTAGE : 750 V RMS
5. CENTER CONTACT RESISTANCE : $\leq 3.0\text{m}\Omega$
6. OUTER CONTACT RESISTANCE : $\leq 2.5\text{m}\Omega$

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : -55°C ~ +125°C

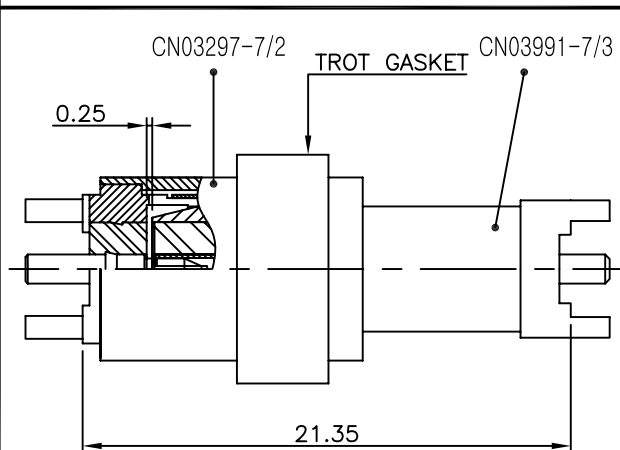

체결도 (SCALE 3:1)

4	TROT GASKET	1	—	—	DGK00324-N/3
3	INSULATOR	1	TEFLON		DIN02136-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT04275-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate (납땜성향상)	DBD04739-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 11. 26.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle	APPROVED BY	I.C.KIM			
MATERIAL	±0.2	CHECKED BY	TITLE PDM50 PCB JS-4R			
	±1°	DRAWN BY				S.Y.EUN
FINISH	-	SCALE	UNIT	A4	DWG NO.	CN03991-7/3
	-	5/1	mm			REVISION