
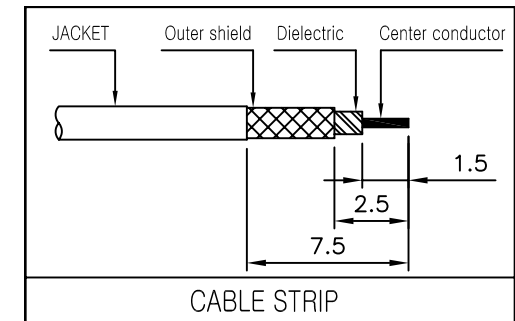
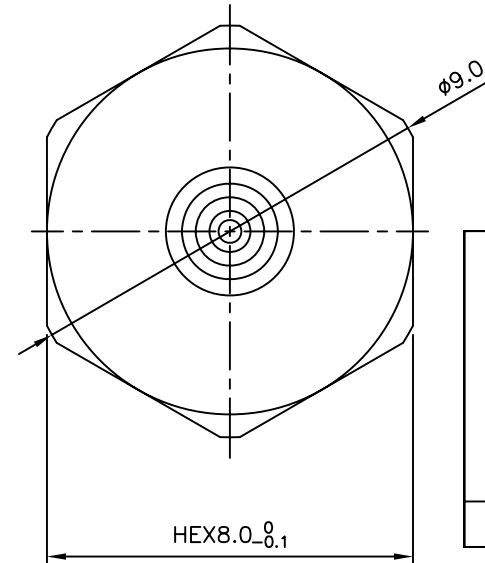


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.06.04.

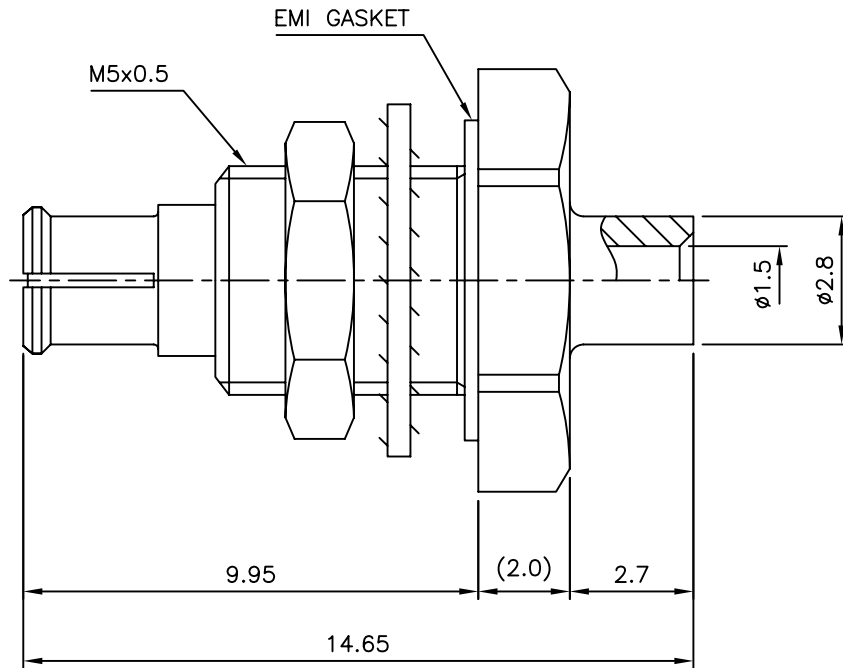

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. DIELECTRIC WITHSTANDING VOLTAGE : 500 V RMS
5. CENTER CONTACT RESISTANCE : $\leq 6.0\text{m}\Omega$
6. OUTER CONTACT RESISTANCE : $\leq 2.0\text{m}\Omega$

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

7	EMI GASKET	1	Carbon	BLACK	DGK00354-N/1
6	WASHER	1	MBsBD C3604BD-F	Gold Plate	DWA00008-5/1
5	NUT	1	MBsBD C3604BD-F	Gold Plate	DNT00002-5/1
4	INSULATOR	1	TEFLON		DIN03225-N/1
3	CONTACT	1	BeCu C17300	Gold Plate	DCT04222-5/1
2	BODY (B)	1	MBsBD C3604BD-F	Gold Plate	DBD04752-5/1
1	BODY (A)	1	BeCu C17300	Gold Plate	DBD04741-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 06. 04.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	-	CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMP50 CABLE JB (F/N) 47F
		DRAWN BY	S.Y.EUN	
FINISH	-	SCALE	6/1	A4 DWG NO. CN03997-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	