

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : -40°C ~ +125°C


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm


2. FREQUENCY RANGE : DC~6GHz

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.06.29.

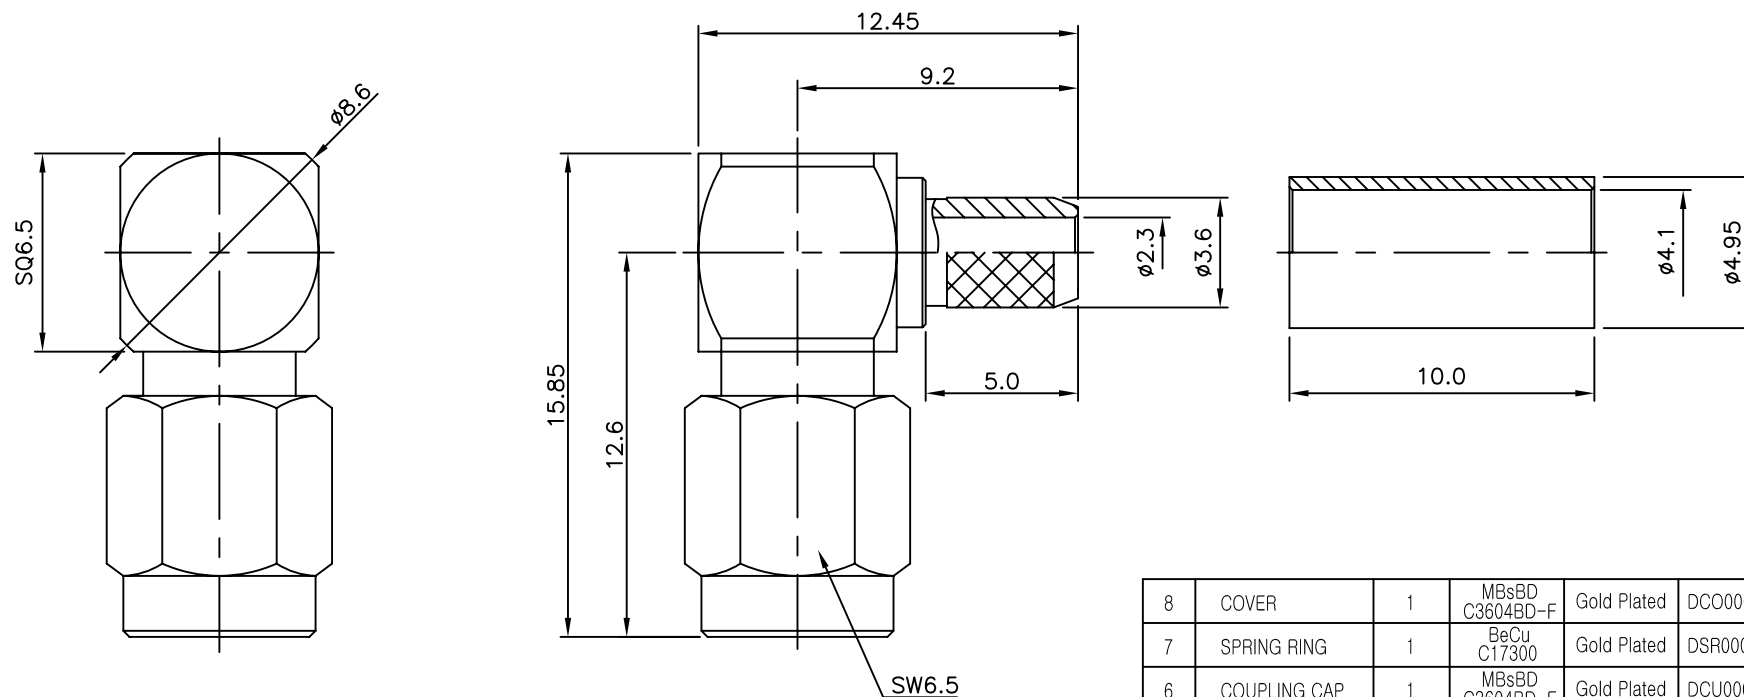

8	COVER	1	MBsBD C3604BD-F	Gold Plated	DCO00014-5/1
7	SPRING RING	1	BeCu C17300	Gold Plated	DSR00003-5/1
6	COUPLING CAP	1	MBsBD C3604BD-F	Gold Plated	DCU00001-5/1
5	INSULATOR	1	TEFLON		DIN03230-N/1
4	GASKET	1	SILICONE RUB		DGK00003-N/2
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plated	DFE00142-5/2
2	CONTACT	1	MBsBD C3604BD-F	Gold Plated	DCT04229-5/1
1	1-2 BODY (원형)	1	MBsBD C3604BD-F	Gold Plated	DBB00516-5/1
	1-1 BODY (사각)	1	MBsBD C3604BD-F		DBD04754-1/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 06. 29.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE SSMA50 CABLE PL SYWV(50Ω)(=Dacar302)
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	4/1	DWG NO. CN04004-7/1 REVISION I R
		UNIT	mm	
				SHEET 1 of 1