

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : -40°C ~ +125°C



ELECTRICAL DATA :

1. IMPEDANCE : 50ohm

2. FREQUENCY RANGE : DC~6GHz

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2021.08.19.

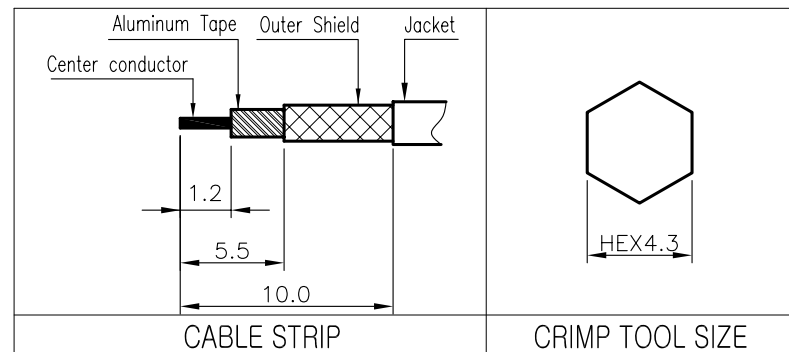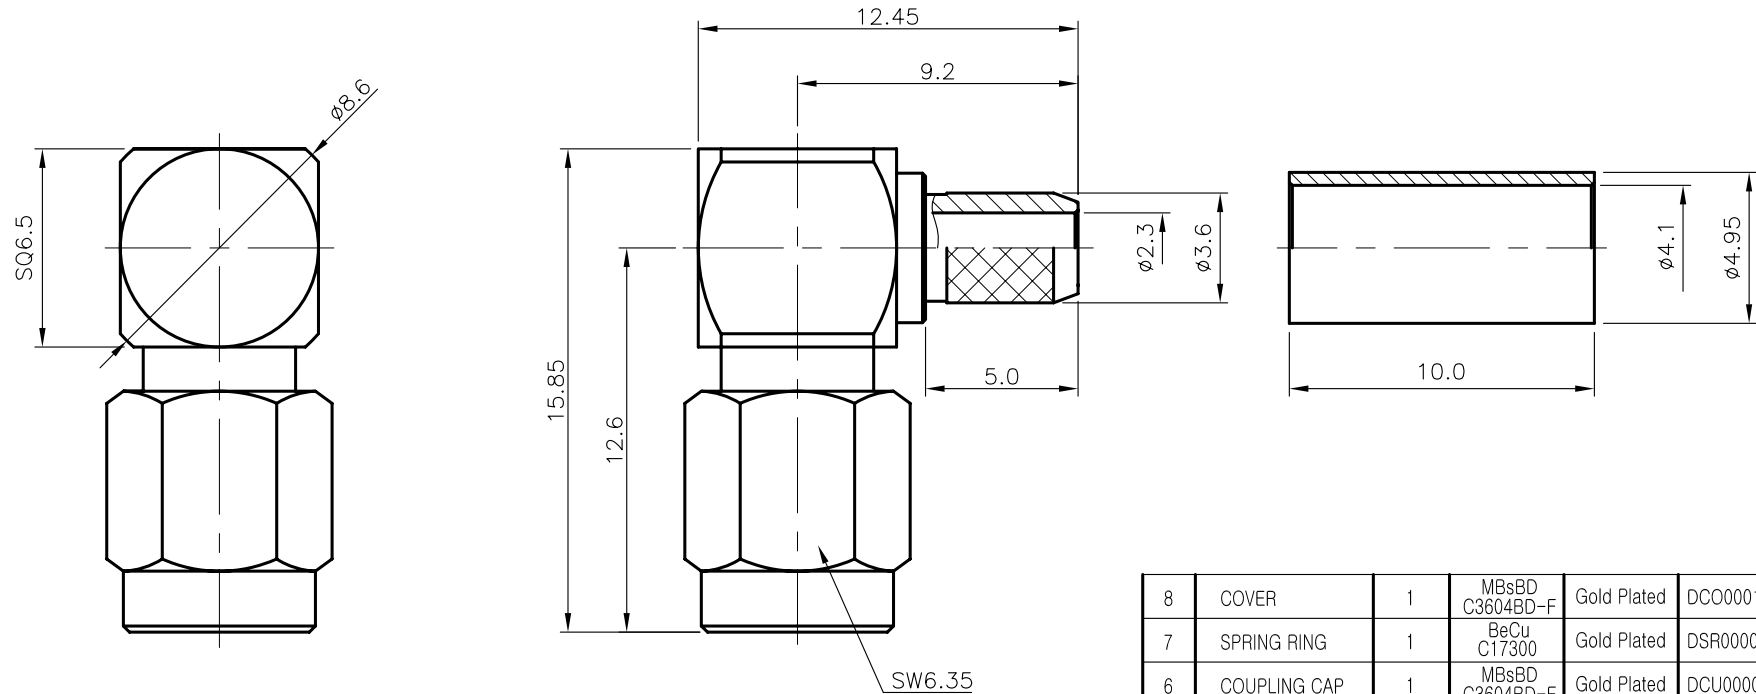

8	COVER	1	MBsBD C3604BD-F	Gold Plated	DCO00014-5/1
7	SPRING RING	1	BeCu C17300	Gold Plated	DSR00003-5/1
6	COUPLING CAP	1	MBsBD C3604BD-F	Gold Plated	DCU00001-5/1
5	INSULATOR	1	TEFLON		DIN03230-N/2
4	GASKET	1	SILICONE RUB		DGK00003-N/2
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plated	DFE00142-5/2
2	CONTACT	1	MBsBD C3604BD-F	Gold Plated	DCT04229-5/2
1-2	BODY (원형)	1	MBsBD C3604BD-F	Gold Plated	DBD04755-1/2
1-1	BODY (사각)	1	MBsBD C3604BD-F	Gold Plated	DBB00516-5/2 DBD04754-1/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE		KJ COMTECH RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle	2021. 08. 19.			
MATERIAL	—	APPROVED BY		TITLE	
		CHECKED BY		SSMA50 CABLE PL SYWV(50Ω)(=Dacar302)	
FINISH	—	DRAWN BY		DWG NO.	
		I.C.KIM		CN04004-7/2	
SCALE		UNIT	A4		SHEET
4/1		mm	1		1 of 1