


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022.04.27.

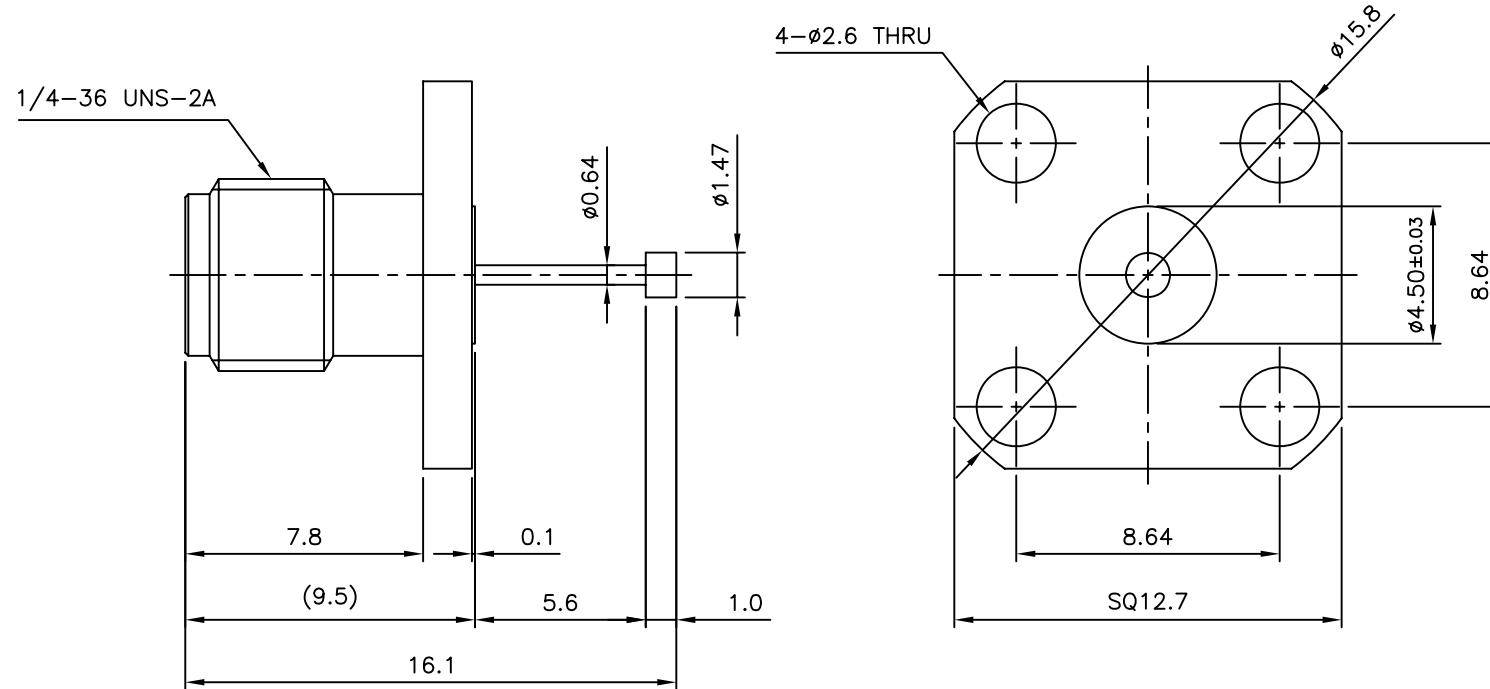

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.2

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

5	포장금형 GASKET	1	NBR	BLACK	DGK00335-N/1
4	INSERT	1	SUS	Passivate	DIS00283-5/R
3	INSULATOR	1	PEEK		DIN02942-N/C
2	CONTACT	1	BeCu C17300	Gold Plate	DCT04305-5/1
1	BODY	1	SUS	Passivated	DBD04821-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2022. 04. 27.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle	APPROVED BY	S.H.KIM				
MATERIAL	±1°	CHECKED BY	TITLE 2.92mm SOLDER END JS-4H				
	_____	DRAWN BY				S.Y.EUN	
FINISH	_____	SCALE	UNIT		A4		
	_____	4/1	mm			DWG NO. CN04051-7/1	
				REVISION	I R	SHEET	1 of 1