
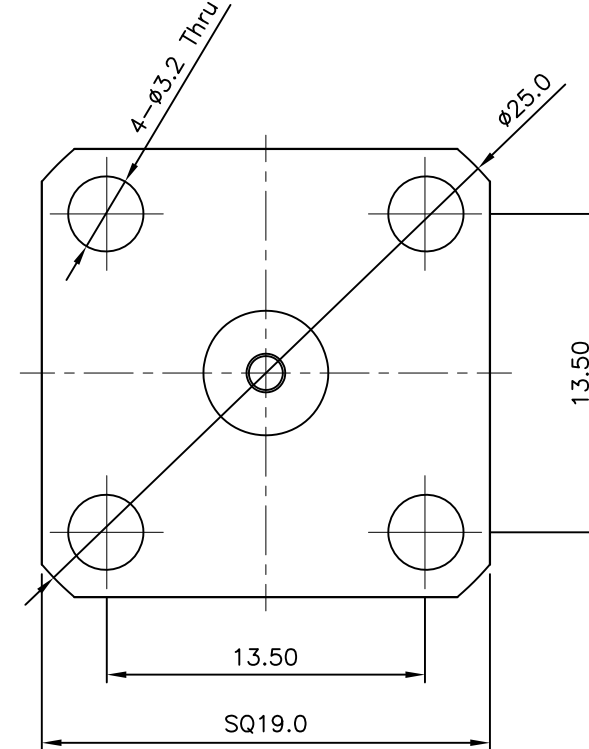


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023.01.27.

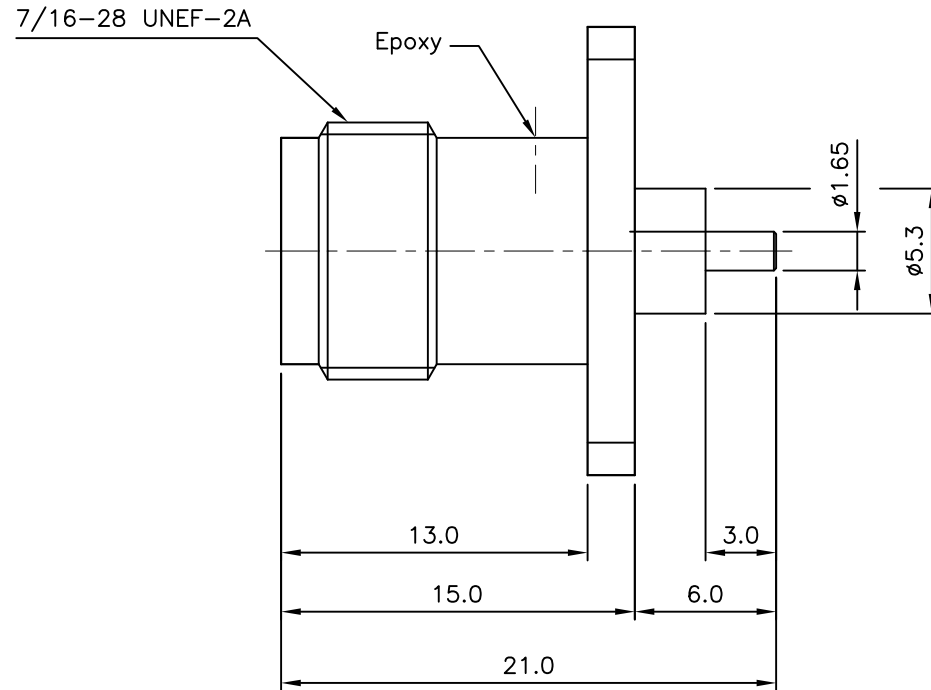

*Note

1. Specification


- 1.1 Frequency range : DC~6GHz
- 1.2 Impedance : 50Ohm Nom.
- 1.3 VSWR : 1.3 Max.
- 1.4 Insulation resistance : 5000MΩ Min.
- 1.5 Operating temperature : -45°C~125°C

2. Material and Finish

- 2.1 Body : Passivated / SUS
- 2.2 Contact : Gold Plated / Beryllium copper (1.27㎍이상)
- 2.3 Insulator : PTFE

3. 2011/65/EU(RoHS) Compliant

3	INSULATOR	1	TEFLON		DIN03337-N/1
2	CONTACT	1	BeCu C17300	Gold Plate (1.27㎍)	DCT04360-5/1
1	BODY	1	SUS303	Passivated	DBD04886-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2023. 01. 27.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY				
MATERIAL		CHECKED BY		TITLE TNC50 SOLDER END JS-4H		
		DRAWN BY S.H.KIM				
FINISH		SCALE 3/1	UNIT mm		A4	DWG NO. CN04093-7/1
						REVISION I R