
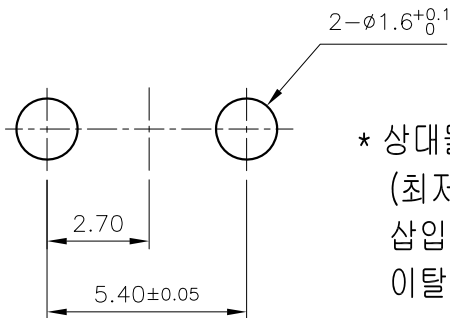


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023.06.02.

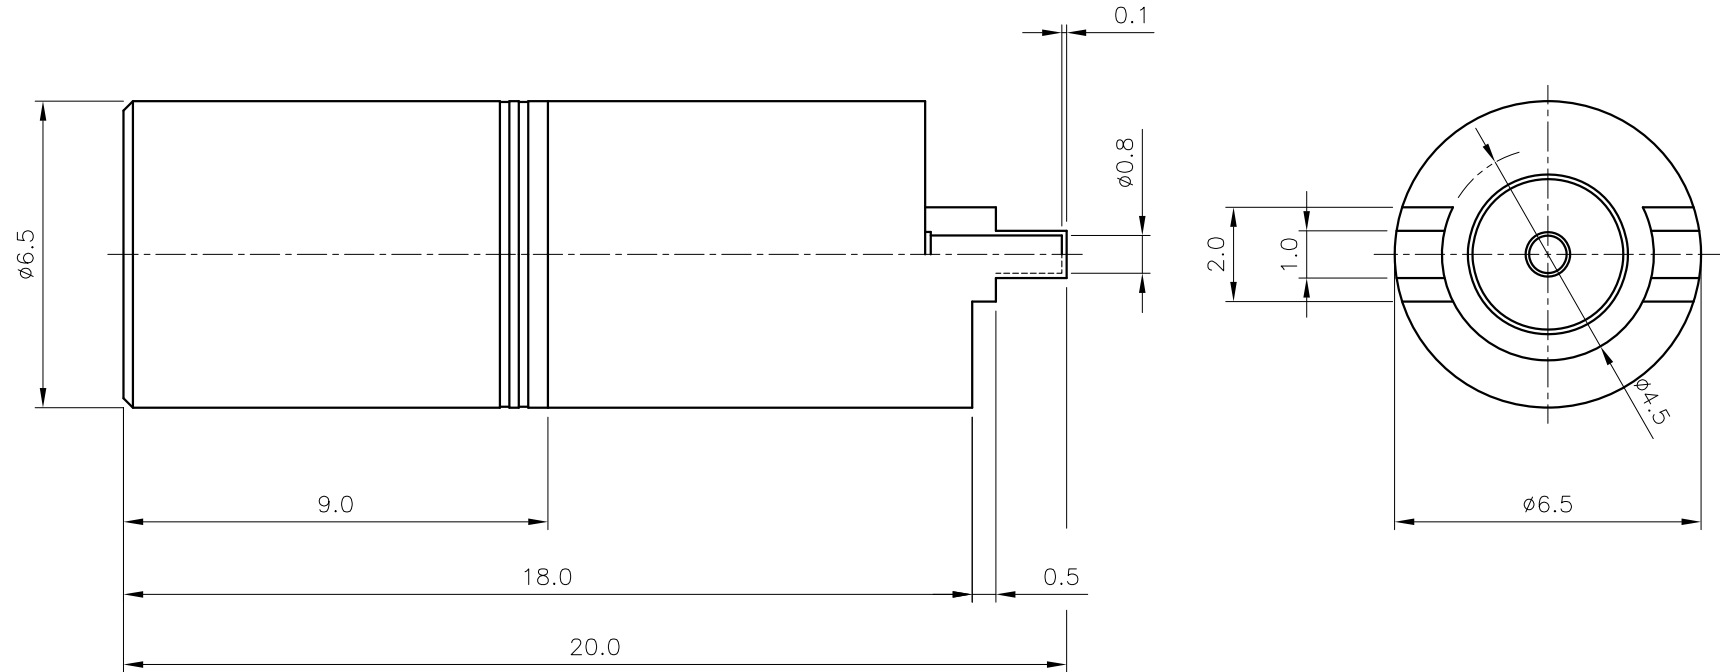

* 상대물 CN03592-7/1 완제품으로 삼, 이탈력 체크 할 것.
(최저치로 관리)
삽입력 : 2~4Kgf
이탈력 : 5~8Kgf

5	SPRING RING	1	BeCu C17300	Copper Plate	DSR00009-5/1
4	CAP	1	MBsBD C3604BD-F	Gold Plate (최저치 Nickel 5μm 이상)	DCU02278-5/1
3	INSULATOR	1	TEFLON		DIN02746-N/1
2	CONTACT	1	BeCu C17300	Gold 0.4μm Plate	DCT04386-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate (최저치 Nickel 5μm 이상)	DBD04149-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2023. 06. 02.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY					
MATERIAL _____		CHECKED BY			TITLE SMB50 PCB PS-2R		
		DRAWN BY S.H.KIM					
FINISH _____		SCALE 6/1	UNIT mm		A4	DWG NO. CN04113-7/1	
						REVISION	I R