


REVISION					
REV	DESCRIPTION	DRAWN	APPR	DATE	
IR	Initial Registration	I.C.KIM	Y.H.CHOI	2010.02.03.	
1	라벨 부착 -> 레이저 마킹 변경	S.Y.EUN	S.H.KIM	2022.02.17.	
2	특성 개선 PCB 코드 변경	S.H.KIM		2022.09.26.	

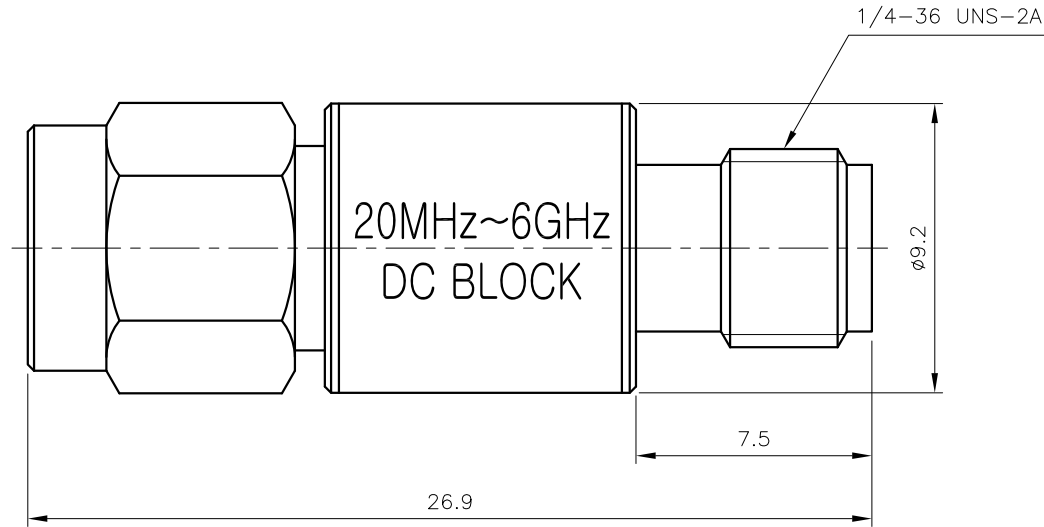

☒	☐	☐
inner	outer	inner/outer

* ELECTRICAL SPECIFICATIONS

- Frequency Range : 20MHz ~ 6GHz
- Impedance : 50Ω
- V.S.W.R (Max.) : 1.2 : 1
- Insertion Loss (Max.) : 0.5dB
- Voltage Rating : 50V

1	11	LABEL	1	은색대드링		DLA00276-8/1
	10	CAPACITOR	1	2012칩 1μF		DCP00055-N/3
2	9	PCB	1	2.5 31mil 1OZ		DPC00482-9/3 DPC00482-9/2
	8	GASKET	1	SILICONE RUB		DGK00004-N/1 (G2001)
	7	SPRING RING	1	SUS	Passivated	DSR00002-5/1 (R2001)
	6	CAP	1	MBsBD	Nickel Plate	DCU00005-5/2 (K2011)
	5	INSULATOR	2	TEFLON		DIN01674-N/1
	4	CONTACT(B)	1	BeCu	Gold Plate	DCT02090-5/1
	3	CONTACT(A)	1	MBsBD	Gold Plate	DCT02089-5/1
	2	BODY(B)	1	MBsBD	Nickel Plate	DBD02585-5/1
	1	BODY(A)	1	MBsBD	Nickel Plate	DBD02584-5/1
	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2022. 09. 28.			 COMTECH KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY					
	CHECKED BY						
MATERIAL _____		DRAWN BY	S.H.KIM		TITLE SMA50-A-JP DC/BLOCK		
FINISH _____		SCALE 4/1	UNIT mm				
					REVISION 2	SHEET 1 of 1	