


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration		C.Y.H.	2011.04.29.
1	라벨 부착 -> 레이저 마킹 변경	S.Y.EUN	S.H.KIM	2022.02.18.

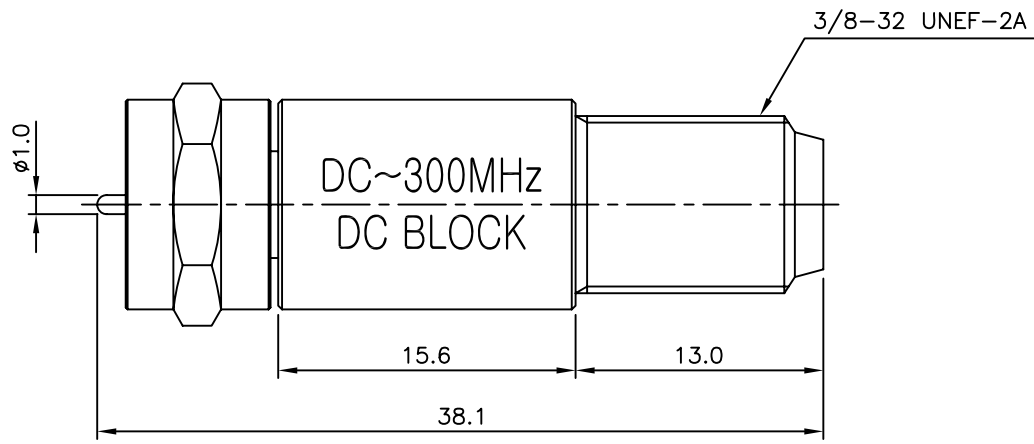


- * ELECTRICAL SPECIFICATIONS
1. Frequency Range : DC ~ 300MHz
 2. Impedance : 75Ω
 3. V.S.W.R (Max.) : 1.2 : 1
 4. Insertion Loss (Max.) : 0.2dB
 5. Voltage Rating : 50V

☒	☐	☐
inner	outer	inner/outer

12	LABEL	1	을무대드용		DLA00397-8/1
11	CAPACITOR	1	2012칩 1μF		DCP00055-N/3
10	PCB	1	2.5 31mil 1OZ		DPC000482-9/2
9	SLEEVE	1	MBsBD	Nickel Plate	DSL00016-5/1
8	COVER	1	MBsBD	Nickel Plate	DCV00078-5/1
7	COUPLING CAP	1	MBsBD	Nickel Plate	DCU00076-5/1
6	INSULATOR	1	PC		DIN01908-N/1
5	INSULATOR	1	PC		DIN00787-N/1
4	INSULATOR	1	TEFLON		DIN01906-N/1
3	CONTACT	1	PBS	Tin Plate	DCT02451-N/1
2	CONTACT	1	MBsBD	Tin Plate	DCT02449-5/1
1	BODY	1	MBsBD	Nickel Plate	DBD02920-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2022. 02. 18.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	S.H.KIM	
MATERIAL		CHECKED BY		TITLE F75-JP-DC BLOCK
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	UNIT	DWG NO. DB00003-7/1 REVISION 1 SHEET 1 of 1
		2.5/1	mm	



A4