
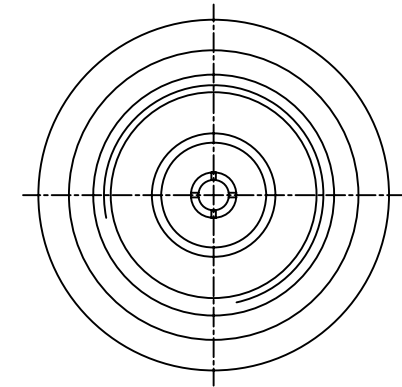


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2017.02.22.

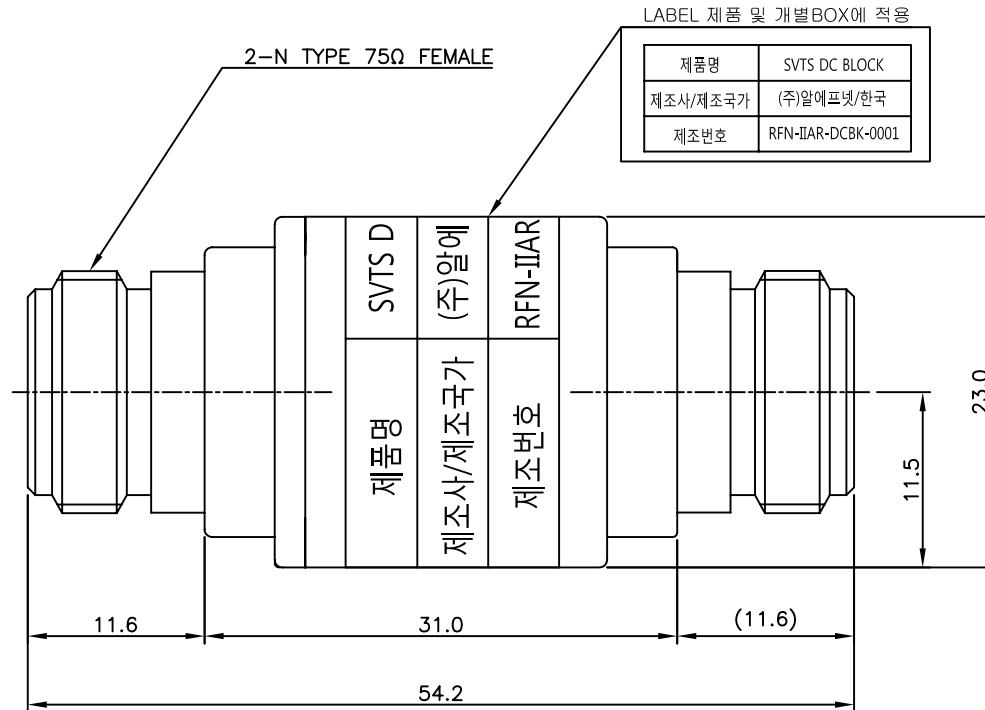

* ELECTRICAL SPECIFICATIONS

Frequency Range : 50 ~ 300MHz

V.S.W.R (Max.) : 1.2 : 1

Insertion Loss (Max.) : 0.3dB

Impedance : 75Ω

Test Voltage (Max.) : 1500V

- Working DC Voltage (Max.) : 1000V

- Working AC Voltage (Max.) : 500V

RF Power (Max.) : 100W

* MECHANICAL SPECIFICATIONS

HOUSING : MBsBD (Nickel Plate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper
(Gold Plate)

INSULATORS : TEFLON

☒	☐	☐
inner	outer	inner/outer

TOLERANCE	Decimal ±0.1	DATE 2017. 02. 22.			 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN		
		CHECKED BY	T.J.KIM		
MATERIAL	_____	DRAWN BY	S.L.SON		TITLE N75-DC BLOCK
FINISH	_____	SCALE 2/1	UNIT mm		DWG NO. DB00011-7/1 REVISION 1 SHEET 1 of 1