



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2019.10.10.

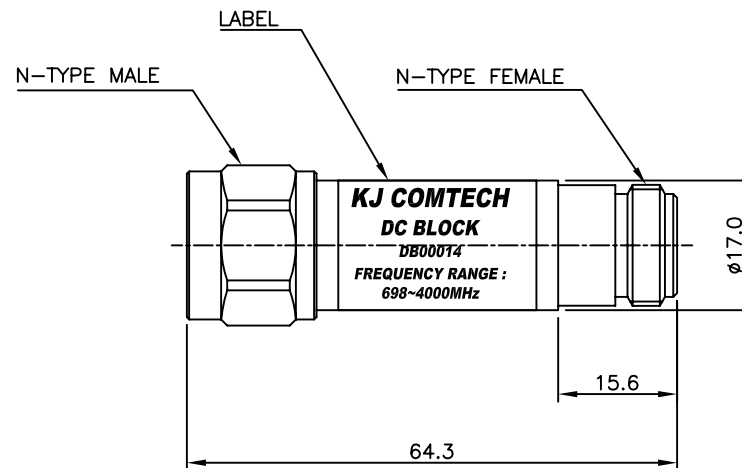

☒	☐	☐
inner	outer	inner/outer

* ELECTRICAL SPECIFICATIONS
 FREQUENCY : 698~4000MHz
 INSERTION LOSS : 0.5dB
 V.S.W.R (Max.) : 1.3 : 1
 PIMD : -153dBc (@33dBm 2Tone)
 IMPEDANCE : 50 Ω
 Voltage Rating : 100V
 RF Power : 100W

* MECHANICAL SPECIFICATIONS
 CONNECTORS : MBsBD (SUCO Plate)
 CONNECTOR PIN(Female) : Beryllium Copper (Silver Plate)
 CONNECTOR PIN(Male) : MBsBD (Silver Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal ± 0.3	DATE 2019. 10. 10.	 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^\circ$	APPROVED BY J.H.YOUN	
MATERIAL	-	CHECKED BY	TITLE N-TYPE DC BLOCK
FINISH	-	DRAWN BY S.L.SON	
SCALE 1/1		UNIT mm	DWG NO. DB00014-7/1 REVISION 1 SHEET 1 of 1