


REVISION		
REV	DESCRIPTION	DATE
1	CHANGED SILK PRINT	2004.10.19.

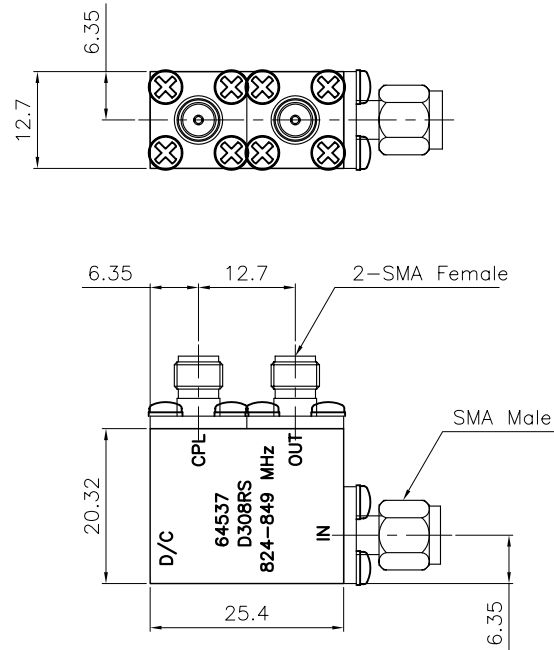

* ELECTRICAL SPECIFICATIONS
Frequency Range : 824.0 ~ 849.0MHz
Coupling Value : 10dB±0.75dB
Coupling Flatness : ±0.15dB
Insertion Loss (Max.) : 0.66dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Gold Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION	REV.A	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS	
TOLERANCE	Decimal	DATE 2004. 10. 19.			 RF & MICROWAVE TECHNOLOGY 1d : 82-32-347-8015 Fax : 82-32-347-8017				
	± 0.3	APPROVED BY							
	Angle	CHECKED BY							
MATERIAL		DRAWN BY		TITLE					
A6061 T6				10dB Directional Coupler					
FINISH		SCALE	UNIT		A4	DWG NO.	DC00002-7/1		
White Chromate		1/1	mm			SHEET	1	OF	1