
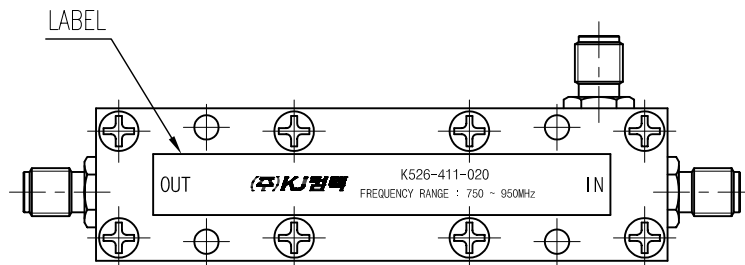
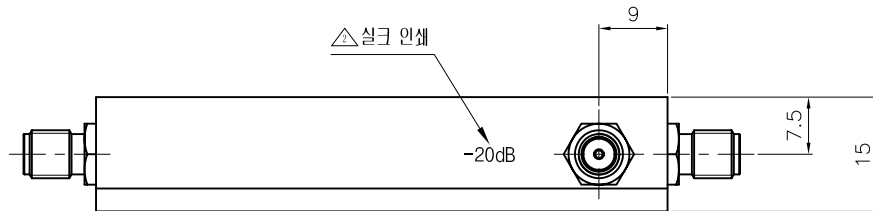


REVISION		
REV	DESCRIPTION	DATE
1	CHANGED SILK PRINT	2003.06.03.
2	CHANGED SILK PRINT & LABEL	2004.04.09.

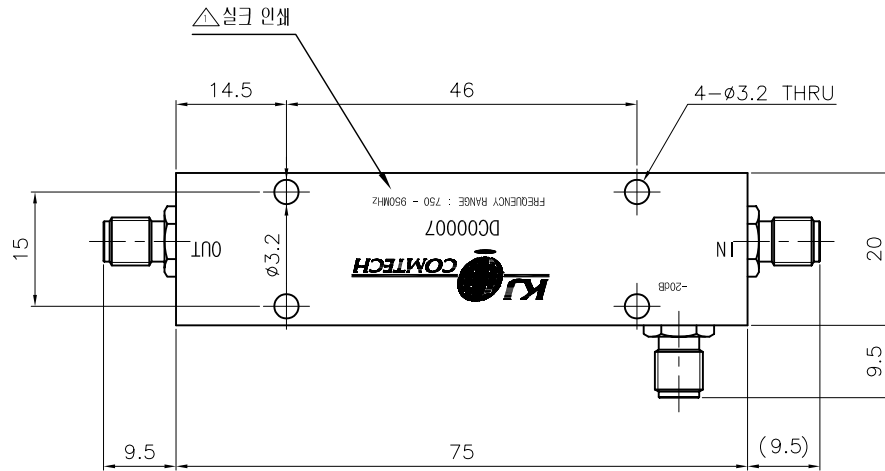

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 750.0 ~ 950.0MHz
 Coupling Value : 20dB $\pm$ 0.5dB
 Insertion Loss (Max.) : 0.3dB
 V.S.W.R (Max.) : 1.2 : 1
 Directivity (Min.) : 25.0dB
 Power Handling (Max.) : 1.0W
 Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (Yellow Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

REVISION	REV.B	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE 2005. 9. 26.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.3	APPROVED BY						
	Angle	CHECKED BY						
MATERIAL		DRAWN BY		TITLE				
A6061 T6				20dB Directional Coupler				
FINISH	SCALE		UNIT		A4	DWG NO.		DC00007-7/1
Yellow Chromate	1/1	mm	SHEET			1	OF	1