


REVISION		
REV	DESCRIPTION	DATE
1	CHANGED SILK PRINT	2004.03.16.

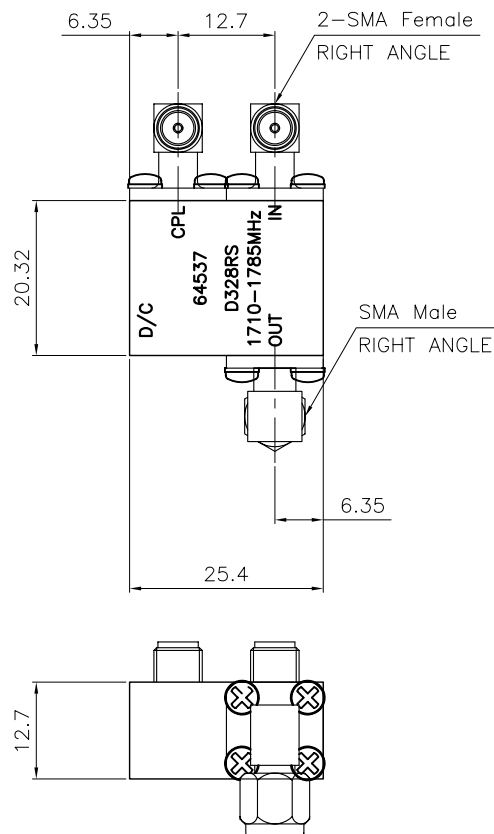

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1710.0 ~ 1785.0MHz
Coupling Value : 10dB $\pm$ 1.0dB
Coupling Flatness : $\pm$ 0.2dB
Insertion Loss (Max.) : 0.66dB
V.S.W.R (Max.) : 1.25 : 1 (IN, OUT PORT)
1.2 : 1 (CPL PORT)
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Gold Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		REV.A	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE		2004. 3. 16.		 RF & MICROWAVE TECHNOLOGY 1d : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.3	APPROVED BY							
	Angle	CHECKED BY							
MATERIAL		DRAWN BY				TITLE			
A6061 T6						10dB Directional Coupler			
FINISH		SCALE	UNIT			A4	DWG NO.	DC00015-7/1	
White Chromate		1/1	mm				SHEET	1	OF