


REVISION		
REV	DESCRIPTION	DATE
1	CHANGED DIMENSION 25 -> 25.1	2004.04.23.

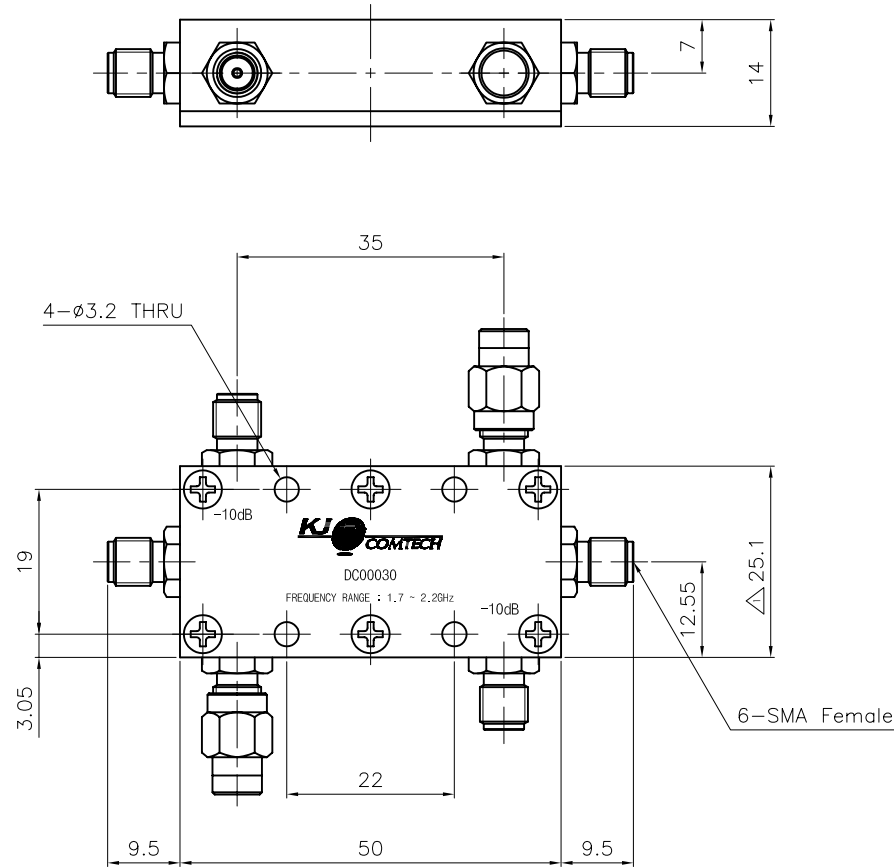

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1700.0 ~ 2200.0MHz
Coupling Value : 10dB±0.7dB
Insertion Loss (Max.) : 1.2dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION	REV.A	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS	
TOLERANCE	Decimal	DATE 2004. 4. 23.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.				
	± 0.3	APPROVED BY							
	Angle	CHECKED BY							
MATERIAL		DRAWN BY		TITLE					
A6061 T6				10dB Directional Coupler					
FINISH	SCALE		UNIT		A4	DWG NO.	DC00030-7/1		
Yellow Chromate	1/1	mm	SHEET			1	OF	1	