
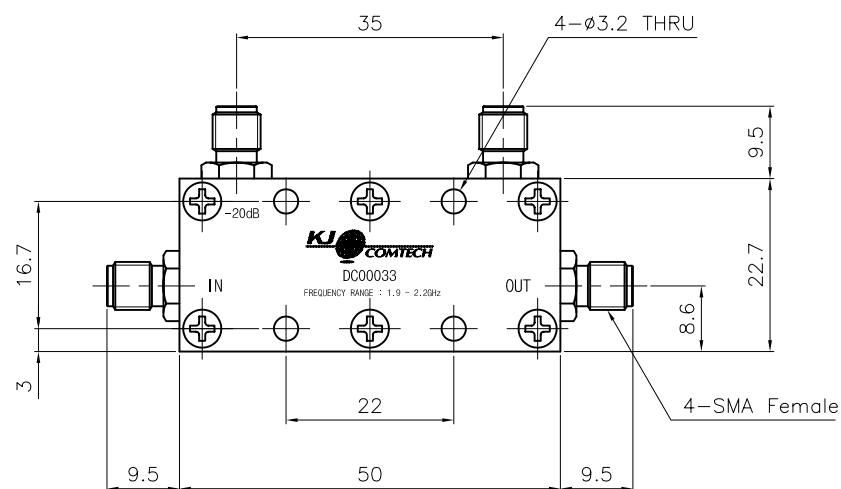


REVISION		
REV	DESCRIPTION	DATE
△		
△		

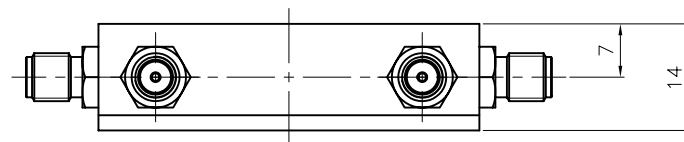

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 1900.0 ~ 2200.0MHz
 Coupling Value : 20dB±0.5dB
 Insertion Loss (Max.) : 0.2dB
 V.S.W.R (Max.) : 1.2 : 1
 Directivity (Min.) : 20.0dB
 Power Handling (Max.) : 10.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (Yellow Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE			2002. 5. 16.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.3	APPROVED BY								
	Angle									
MATERIAL	± 1"		CHECKED BY				TITLE <i>20dB Directional Coupler</i>			
	A6061 T6		DRAWN BY							
FINISH	SCALE		UNIT			A4		DWG NO. <i>DC00033-7/1</i>		
Yellow Chromate	1/1		mm					SHEET 1 OF 1		