


REVISION		
REV.	DESCRIPTION	DATE
▲		
▲		

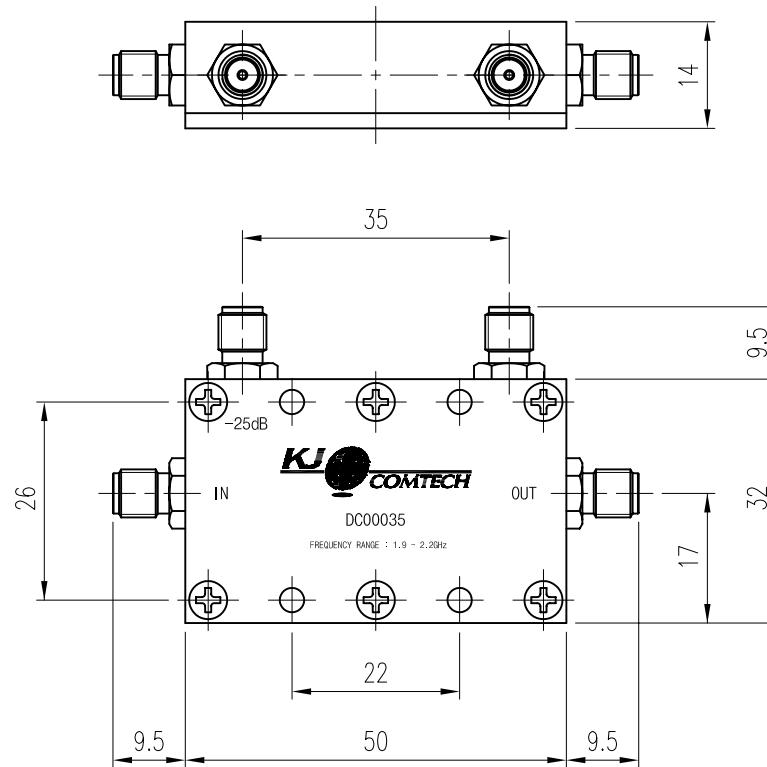

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1900.0 ~ 2200.0MHz
Coupling Value : 25dB±0.5dB
Insertion Loss (Max.) : 0.4dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 25.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS	
TOLERANCE	Decimal			DATE	2002. 5. 31.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.				
	± 0.3			APPROVED BY							
	Angle			CHECKED BY							
MATERIAL				DRAWN BY			TITLE				
A6061 T6						25dB Directional Coupler					
FINISH				SCALE	UNIT		A4	DWG NO.	DC00035-7/1		
Yellow Chromate				1/1	mm			SHEET	1	OF	1