
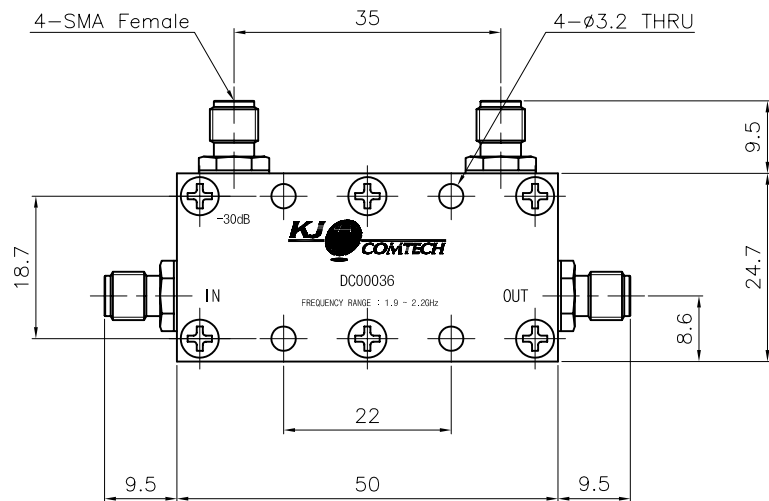


REVISION		
REV	DESCRIPTION	DATE
△		
△		

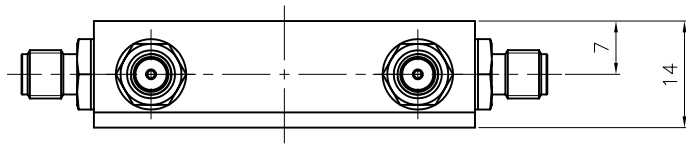

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 1900.0 ~ 2200.0MHz
 Coupling Value : 30dB±0.5dB
 Insertion Loss (Max.) : 0.2dB
 V.S.W.R (Max.) : 1.2 : 1
 Directivity (Min.) : 20.0dB
 Power Handling (Max.) : 100.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (Yellow Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal			DATE	2005. 10. 10.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	± 0.3			APPROVED BY						
	Angle			CHECKED BY						
MATERIAL		± 1°		DRAWN BY				TITLE 30dB Directional Coupler		
		A6061 T6								
FINISH		SCALE		UNIT		A4	DWG NO. DC00036-7/1			
Yellow Chromate		1/1		mm			SHEET 1 OF 1			