
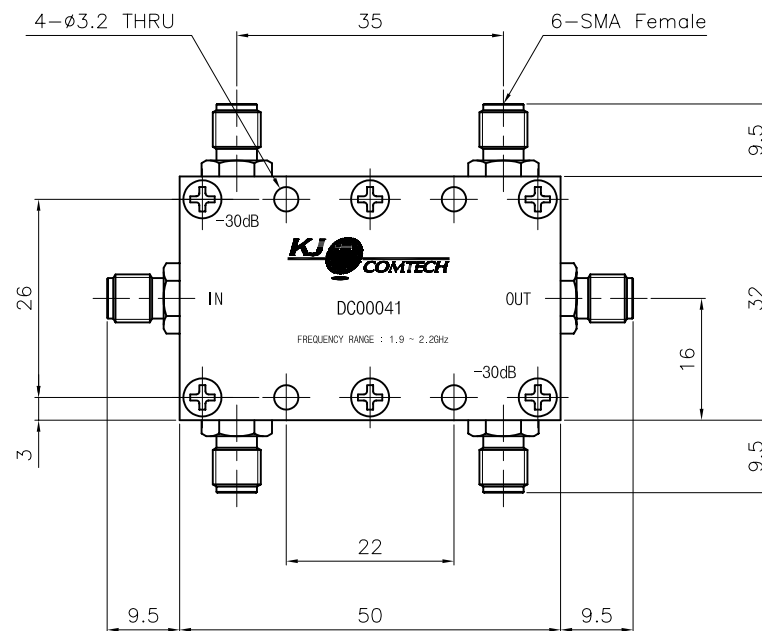


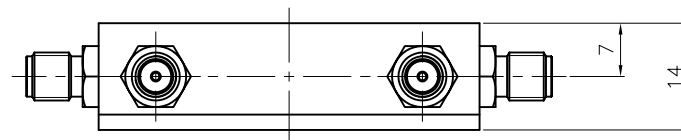

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1900.0 ~ 2200.0MHz
Coupling Value : 30dB $\pm$ 0.5dB
Insertion Loss (Max.) : 0.3dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 100.0W
Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE			2002. 5. 16.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.3	APPROVED BY								
	Angle									
MATERIAL	± 1°		CHECKED BY				TITLE <i>30dB Directional Coupler</i>			
	A6061 T6		DRAWN BY							
FINISH	Yellow Chromate		SCALE	UNIT			A4	DWG NO. <i>DC00041-7/1</i>		
		1/1	mm					SHEET 1 OF 1		