
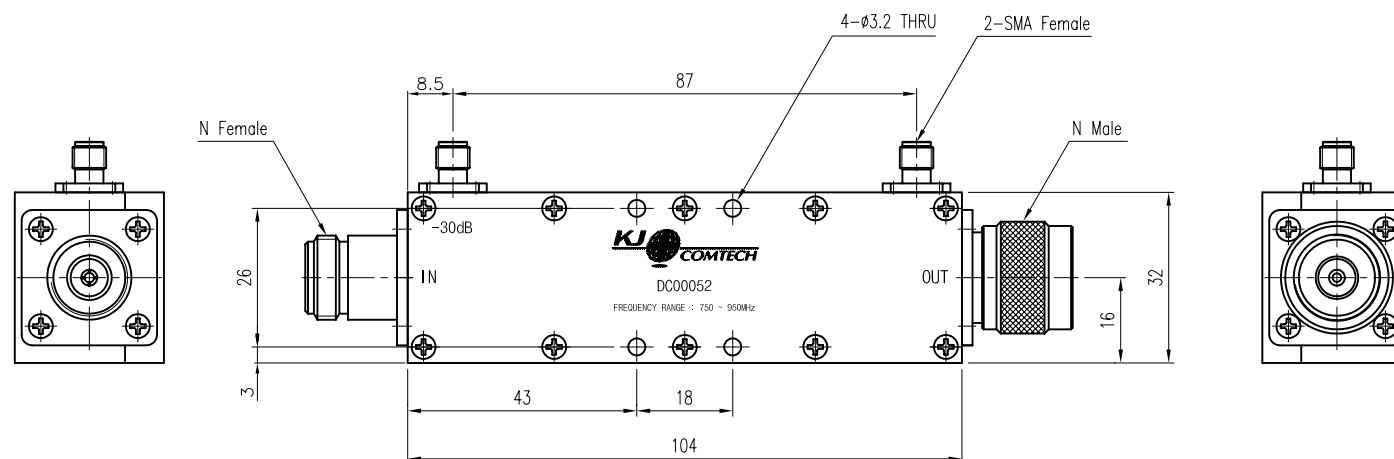


REVISION		
REV	DESCRIPTION	DATE
△		
△		

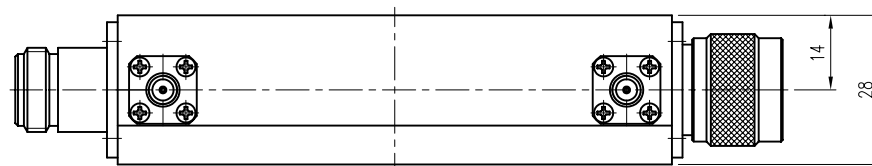

* ELECTRICAL SPECIFICATIONS
Frequency Range : 750.0 ~ 950.0MHz
Coupling Value : 30dB±0.5dB
Insertion Loss (Max.) : 0.3dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 100.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal			DATE		2001. 7. 25.	 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	± 0.3			APPROVED BY						
	Angle			CHECKED BY						
MATERIAL		A6061 T6		DRAWN BY			TITLE <i>30dB Directional Coupler</i>			
FINISH		SCALE		UNIT		A3	DWG NO.		DC00052-7/1	
Yellow Chromate		1/1		mm			SHEET		1	OF