


REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
	X1	PROTOTYPE RELEASE	11-5-99	LH
	X2	ECN 18836 BV/TM T.	1-7-00	TB 1-12-00
	X3	ECN 18318 TM	02-16-00	
	X4	PRODUCTION RELEASE USELESS PLUG HOLE REMOVED	9-24-03	

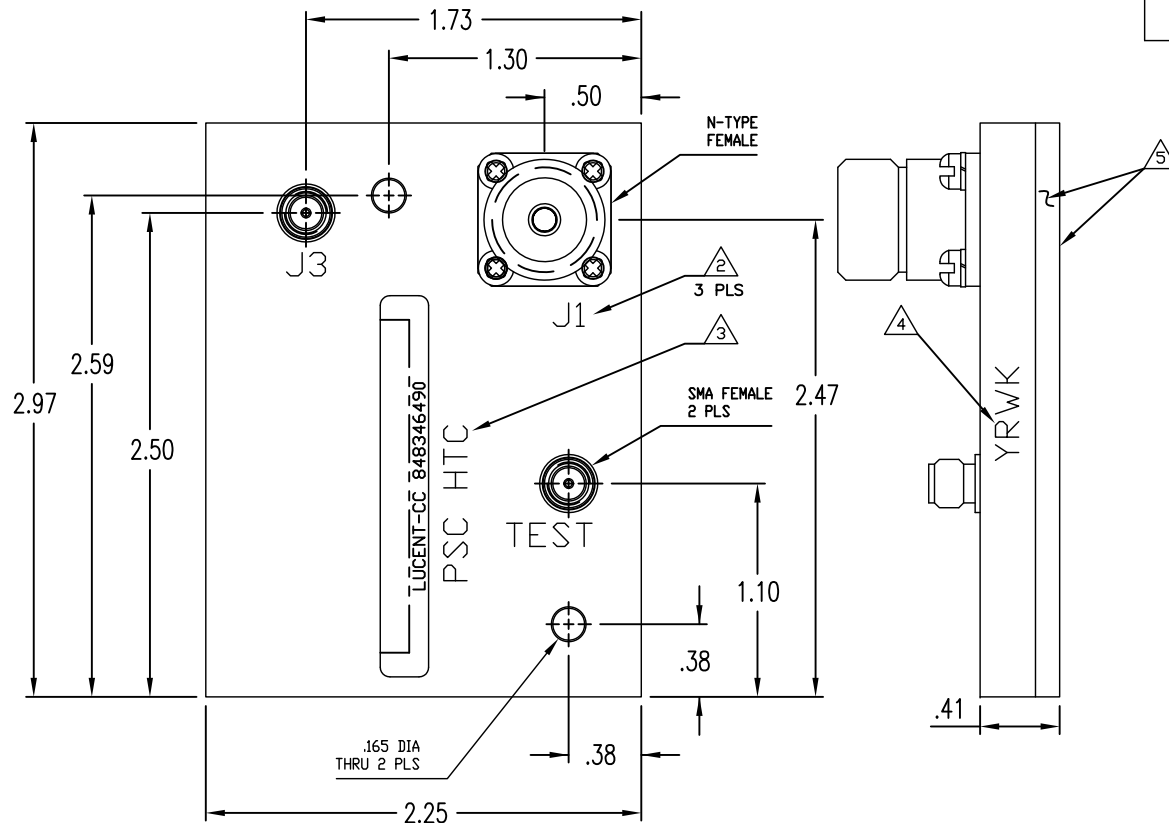

14	정전기방지방비봉투	1		(M2.6-6접	I2-001-4
13	CONNECTOR BOLT	4	SUS	(M2.6-8동	BbS0M2.6-5
12	CASE BOLT	13	SUS	큰)	BbS0M2.6-8
11	STICKER	1			XF011
10	GASKET-2	2			G2007
09	GASKET-1	1			G8024
08	EYELET	3			X1030
07	SLEVE	2			X3012
06	SMA-CONNECTOR-1	2			K314-532-000
05	N-CONNECTOR-2	1			K345-425-000
04	PCB-2	1			XK059
03	PCB-1	1	A 6061		XK606
02	COVER-1	1	T6 A 6061		XP037
01	CASE	1	T6		XT036
품번	품 명	수량	재 질	표면처리	비 고

- NOTES:
- 1: FINISH: LUCENT CENTRAL OFFICE WHITE
SMOOTH FINISH #827
 - 2 MARKING TO BE BLACK 12 PT
HELvetica MEDIUM CONDENSED
 - 3 MARKING TO BE BLACK 12 PT
FRUTIGER ROMAN
 - 4 APPLY DATE CODE.
 - 5 THESE SURFACES TO BE FREE OF
PRIMER AND/OR PAINT.

ELECTRICAL SPECIFICATIONS	
FREQUENCY.....	1930~1990MHz
PATH LOSS.....	0.2dB MAX
COUPLING.....	50dB ±1.0dB
DIRECTIVITY.....	20dB MIN
VSWR.....	1.20:1 MAX @ J1 & J3 1.25:1 MAX @ J2
POWER.....	75W CW, 1.5KW PEAK
OPERATING TEMP.....	0° TO +70°C
STORAGE TEMP.....	-40° TO +70°C

UNLESS OTHERWISE SPECIFIED		DATE 2003. 9. 24.		 CHUNG WOO ELECTRONICS CO., LTD	
DIMENSIONS ARE IN INCHES		APPROVED BY			
TOLERANCES: ANGLES ± 1°		CHECKED BY		TITLE OUTLINE, HIGH POWER COUPLER	
DECIMALS: .XX= ± .01 .XXX= ± .005		DRAWN BY			
CONCENTRICITY: .004 T.I.R.		SCALE		A4	DWG NO. OL-CL-K31S-2
SURFACE FINISH: 63√		UNIT INCH			SHEET 1 OF 1
BREAK ALL EDGES		WEIGHT _____			