
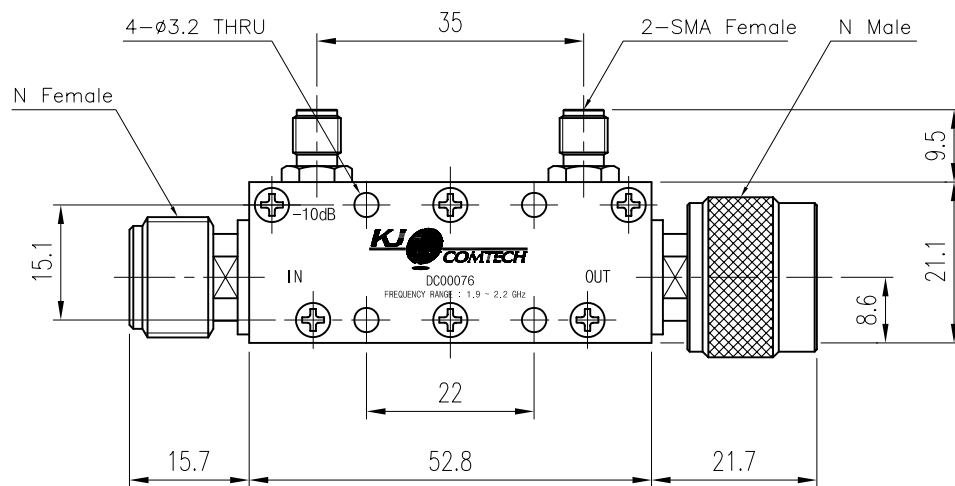


REVISION		
REV	DESCRIPTION	DATE
△		
△		

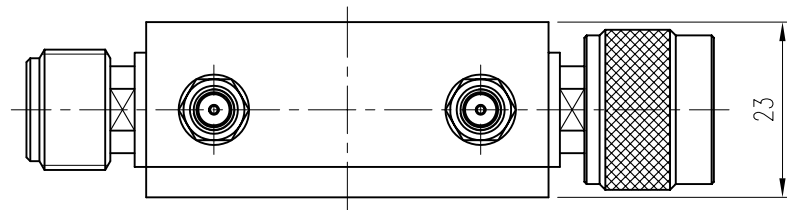

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1900.0 ~ 2200.0MHz
Coupling Value : 10dB±0.5dB
Insertion Loss (Max.) : 0.7dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION			I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal		DATE		2003. 2. 3.		 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017				
	± 0.3		APPROVED BY								
	Angle										
MATERIAL	A6061 T6		CHECKED BY				TITLE <i>10dB Directional Coupler</i>				
			DRAWN BY								
FINISH	Yellow Chromate		SCALE		UNIT		A4				
			1/1		mm						
								DWG NO. <i>DC00076-7/1</i>			
								SHEET 1 OF 1			