


REVISION		
REV	DESCRIPTION	DATE
▲		
▲		

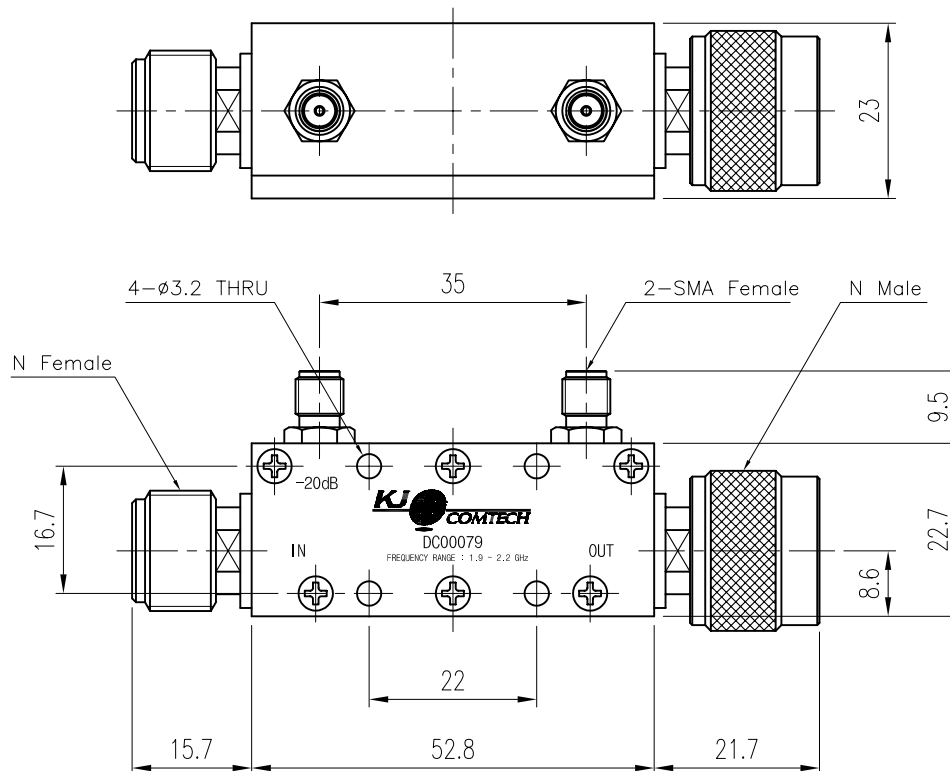

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1900.0 ~ 2200.0MHz
Coupling Value : 20dB±0.5dB
Insertion Loss (Max.) : 0.3dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 10.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal			DATE	2003. 2. 3.	 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	± 0.3			APPROVED BY					
	Angle			CHECKED BY					
MATERIAL				DRAWN BY		TITLE			
A6061 T6						20dB Directional Coupler			
FINISH		SCALE		UNIT		DWG NO.	DC00079-7/1		
Yellow Chromate		1/1		mm		A4	SHEET	1	OF