

1



2

3

4

REVISION

REV	DESCRIPTION	DATE
△		
△		

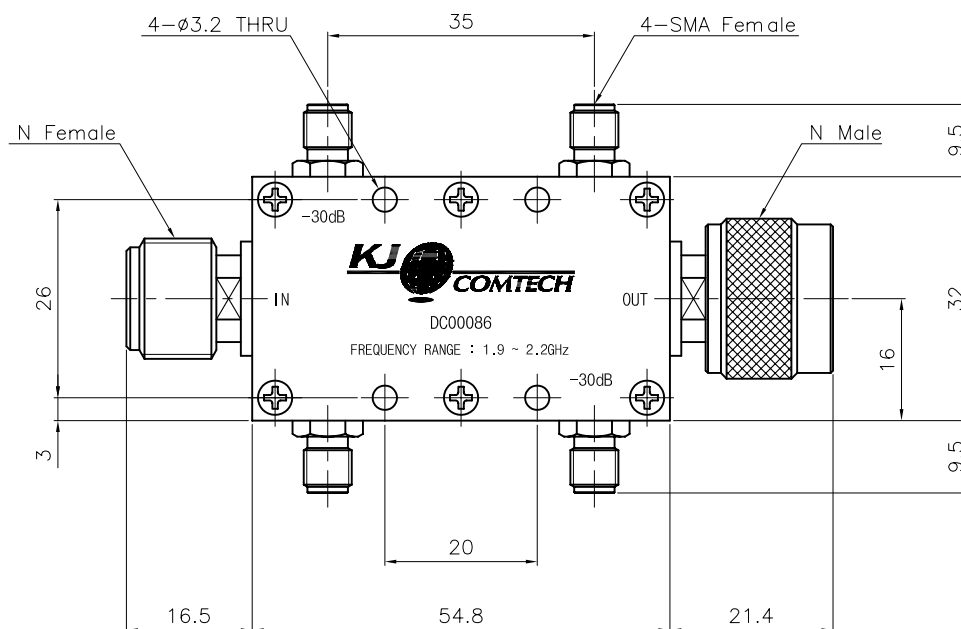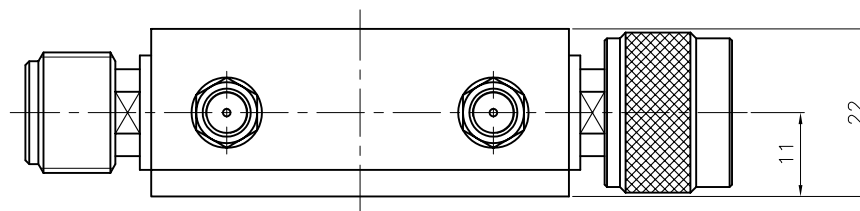

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1900.0 ~ 2200.0MHz

Coupling Value : 30dB±0.5dB

Insertion Loss (Max.) : 0.3dB

V.S.W.R (Max.) : 1.2 : 1

Directivity (Min.) : 20.0dB

Power Handling (Max.) : 100.0W

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

REVISION	I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	± 0.3	DATE		2003. 7. 3.	 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle	± 1°	APPROVED BY						
			CHECKED BY						
MATERIAL	A6061 T6		DRAWN BY			TITLE	30dB Directional Coupler		
FINISH	Yellow Chromate		SCALE	UNIT		A4	DWG NO.	DC00086-7/1	
			1/1	mm			SHEET	1	OF