

1


2

3

4

REVISION

REV	DESCRIPTION	DATE
△		
△		

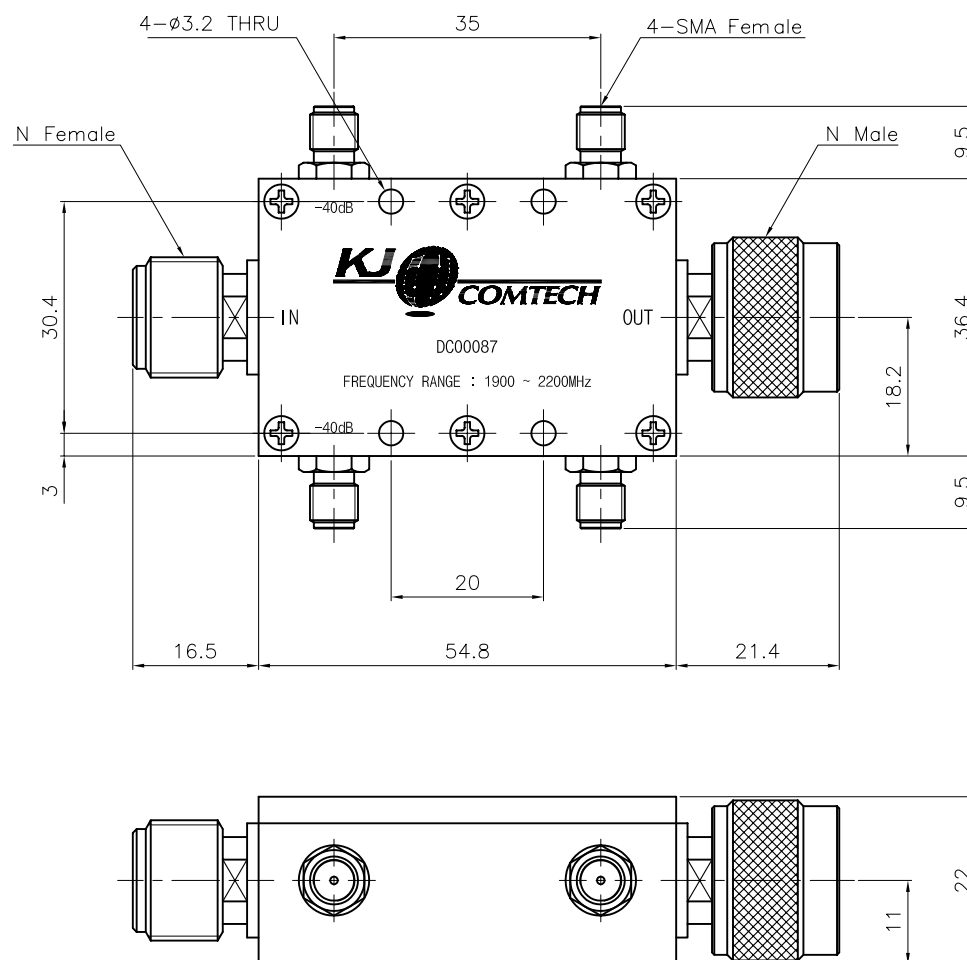

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1900.0 ~ 2200.0MHz
Coupling Value : 40dB±0.5dB
Insertion Loss (Max.) : 0.2dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 200.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	± 0.3		DATE		2004. 9. 15.	 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle	± 1°		APPROVED BY						
			CHECKED BY							
	A6061 T6		DRAWN BY							
MATERIAL						TITLE				
						40dB Directional Coupler				
FINISH		Yellow Chromate		SCALE	1/1	UNIT	mm			A4
								DWG NO.		DC00087-7/1
								SHEET		1 OF 1