
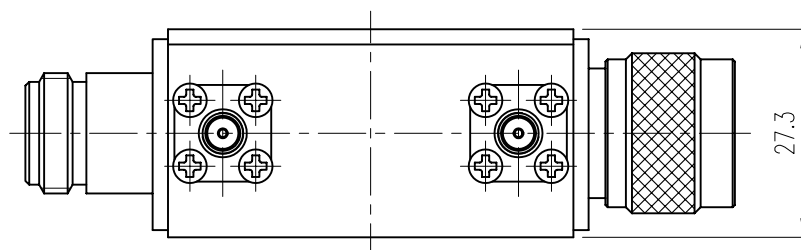


REVISION		
REV	DESCRIPTION	DATE
△		
△		

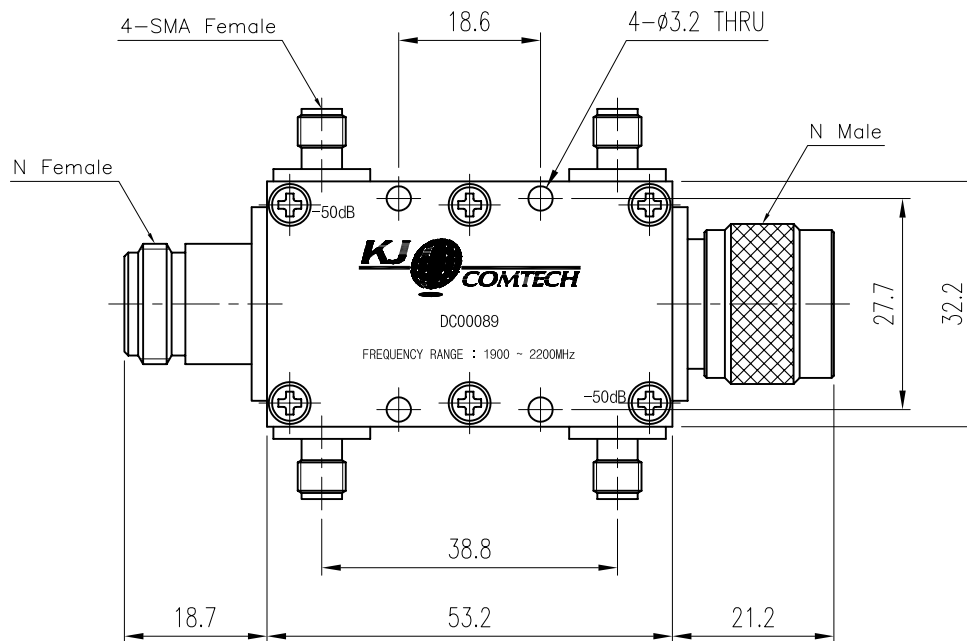

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 1900.0 ~ 2200.0MHz
 Coupling Value : 50dB±1.0dB
 Coupling Flatness : ±0.3dB
 Insertion Loss (Max.) : 0.2dB
 V.S.W.R (Max.) : 1.2 : 1
 Directivity (Min.) : 20.0dB
 Power Handling (Max.) : 200.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (Yellow Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS		
TOLERANCE	Decimal	± 0.3		DATE		2004. 4. 27.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.					
	Angle	± 1°		APPROVED BY								
			CHECKED BY									
MATERIAL		A6061 T6		DRAWN BY				TITLE				
									50dB Directional Coupler			
FINISH		Yellow Chromate		SCALE		1/1	UNIT		mm		A4	
										DWG NO.		DC00089-7/1
										SHEET	1	OF 1