
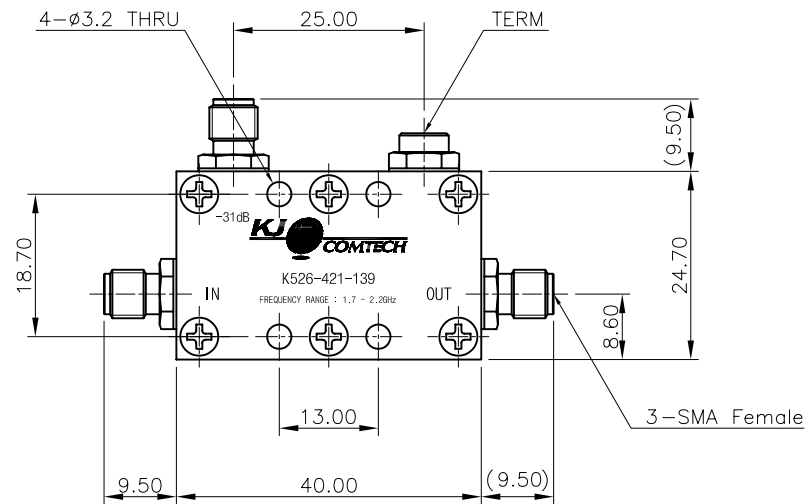


REVISION		
REV	DESCRIPTION	DATE
IR	최초 개정	2006.09.01.

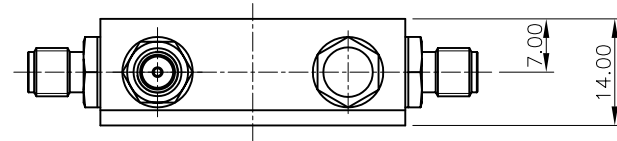

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1700.0 ~ 2200.0MHz

Coupling Value : 31dB±1.2dB

Insertion Loss (Max.) : 0.2dB

V.S.W.R (Max.) : 1.22 : 1

Directivity (Min.) : 20.0dB

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2006. 09. 01.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	S.W.LEE	
MATERIAL	±1°	CHECKED BY	J.H.YOUN	KJ COMTECH CO.,LTD. TITLE 31dB Directional Coupler
	A6061 T6	DRAWN BY	K.I.CHO	
FINISH	Yellow Chromate	SCALE	1/1	DWG NO. DC00137-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	

A4