
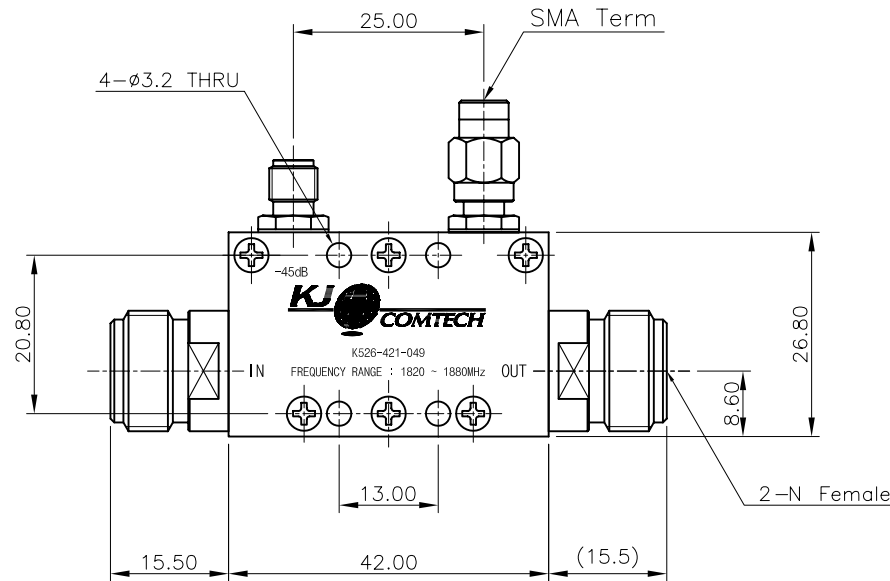


REVISION		
REV	DESCRIPTION	DATE
1R	최초 개정	2006.11.16.

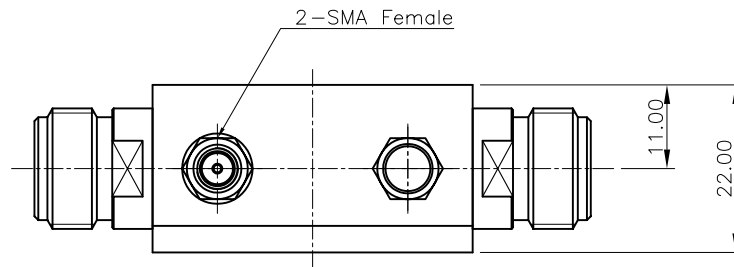

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1820.0 ~ 1880.0MHz

Coupling Value : 45dB±0.5dB

Insertion Loss (Max.) : 0.2dB

V.S.W.R (Max.) : 1.22 : 1

Directivity (Min.) : 20.0dB

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2006. 11. 16.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	±0.3	APPROVED BY	S.W.LEE	TITLE		
	Angle					
MATERIAL	±1°	CHECKED BY	J.H.YOUN		45dB Directional Coupler	
	A6061 T6	DRAWN BY	K.I.CHO			
FINISH	Yellow Chromate	SCALE	UNIT		A4	
1/1		mm	DWG NO.			DC00146-7/1
						REVISION