


REVISION		
REV	DESCRIPTION	DATE
△		
△		

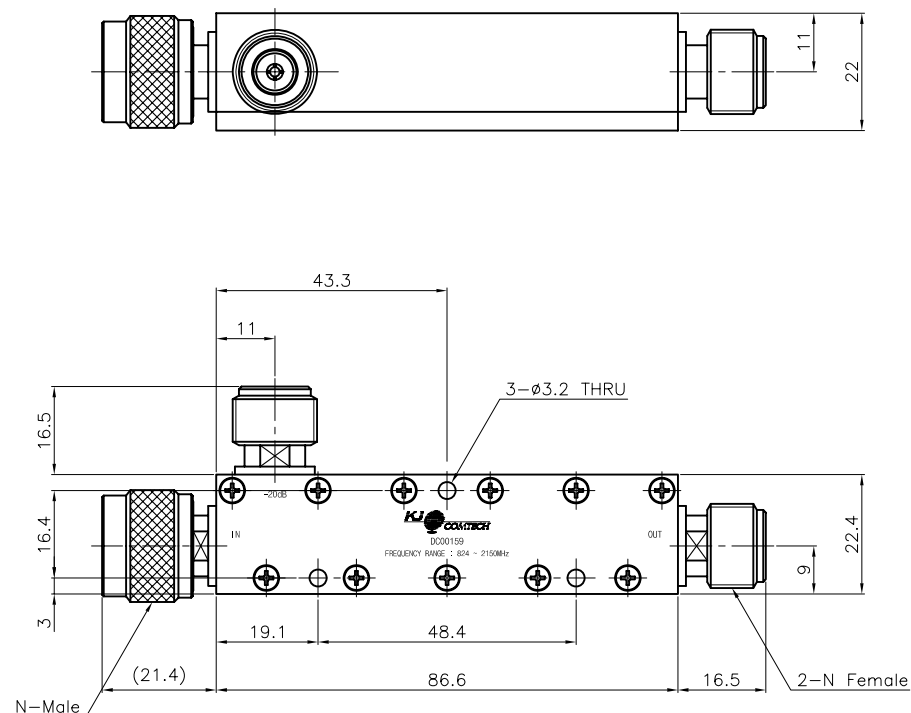

* ELECTRICAL SPECIFICATIONS

Frequency Range : 824.0 ~ 894.0MHz
1940.0 ~ 2150.0MHz

Coupling Value : 20dB±1.0dB

Insertion Loss (Max.) : 0.4dB

V.S.W.R (Max.) : 1.22 : 1

Directivity (Min.) : 15.0dB

Power Handling (Max.) : 5.0W

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS	
TOLERANCE	Decimal			DATE		2008. 7. 4.		 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-52-347-8015 Fax : 82-52-347-8017			
	± 0.3			APPROVED BY							
	Angle			CHECKED BY							
	± 1°			DRAWN BY							
MATERIAL						TITLE		20dB Directional Coupler			
A6061 T6											
FINISH		SCALE		UNIT		A3		DWG NO.		DC00159-7/1	
White Chromate		1/1		mm				SHEET		1 OF 1	
											