
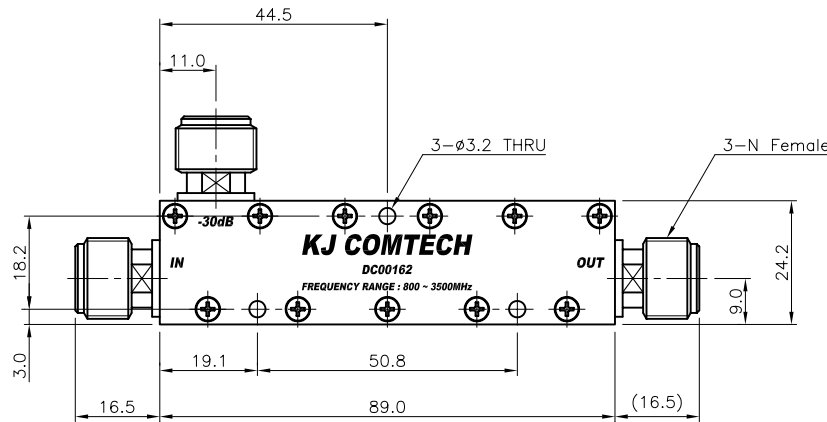


REVISION		
REV	DESCRIPTION	DATE
I R	최초 개정	2008.10.28.

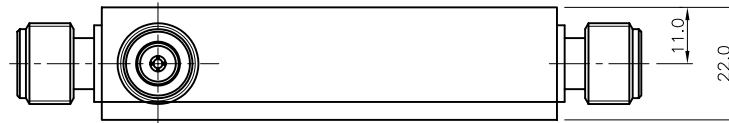

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 800.0 ~ 3500.0MHz
 Coupling Value : 30dB $\pm$ 1.0dB
 Insertion Loss (Max.) : 0.4dB
 V.S.W.R (Max.) : IN, OUT PORT - 1.2 : 1,
 COUPLING PORT - 1.3 : 1
 Directivity (Min.) : 18.0dB
 Power Handling (Max.) : 100.0W
 Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

주 기
 1. SILK COLOR : WHITE

TOLERANCE	Decimal ±0.3	DATE	2008. 10. 28.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	S.W.LEE		
MATERIAL	A6061 T6	CHECKED BY	J.H.YOUN		KJ COMTECH CO.,LTD. TITLE 30dB Directional Coupler
		DRAWN BY	K.I.CHO		
FINISH DIC-183 (Texture)	SCALE 1/1	UNIT mm		A3	DWG NO. DC00162-8/1
					REVISION I R