


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Revision	2009. 1. 19.

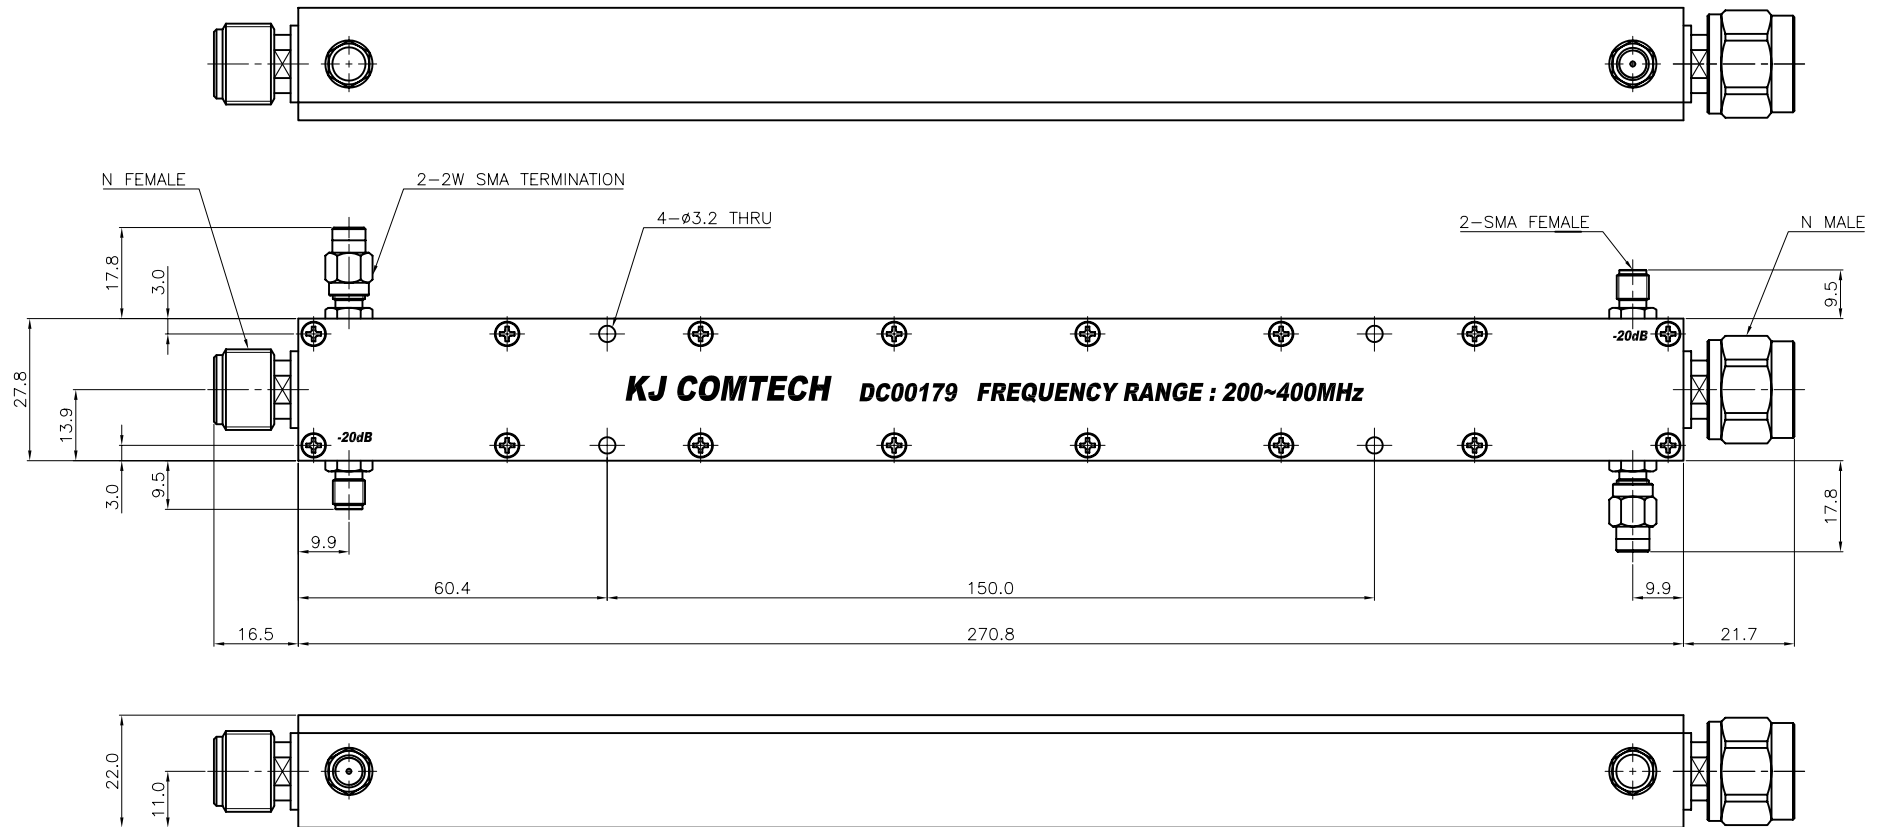

* ELECTRICAL SPECIFICATIONS
Frequency Range : 200~400MHz
Coupling Value : 20dB $\pm$ 1.2dB
Insertion Loss (Max.) : 0.5dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 100.0W
Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ± 0.3	DATE 2009. 1. 19.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^\circ$	APPROVED BY J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	TITLE 20dB Dual Coupler
FINISH	White Chromate	DRAWN BY K.I.CHO	
SCALE 1/1		UNIT mm	A3 DWG NO. DC00179-7/1 REVISION I R SHEET 1 of 1