


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Revision	2009.02.26.

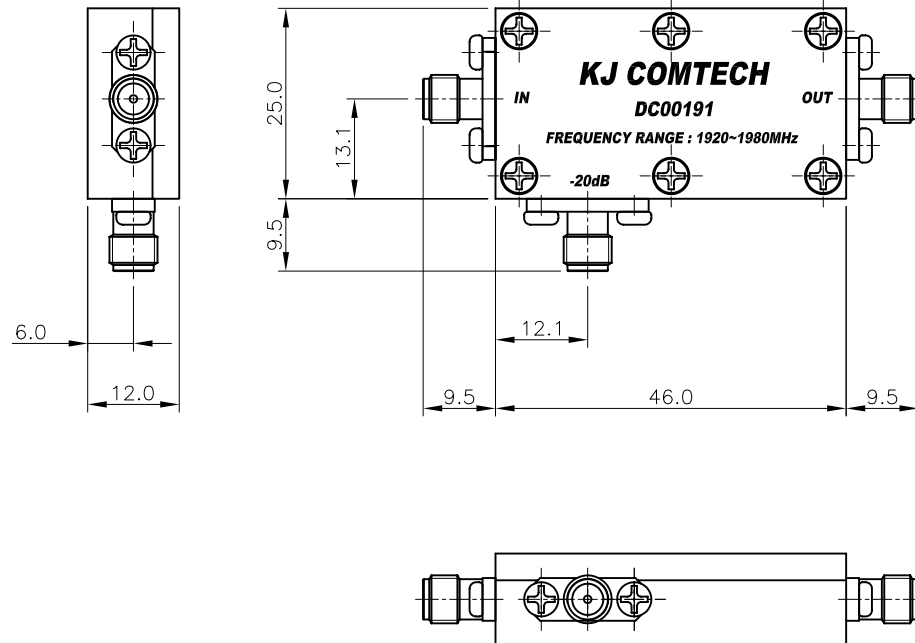

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1920~1980MHz
Coupling Value : 20 ± 0.5 dB
Insertion Loss (Max.) : 0.3dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 10W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ± 0.3	DATE 2009. 02. 26.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^\circ$	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	K.I.CHO	KJ COMTECH CO.,LTD. TITLE 20dB Single Coupler
		DRAWN BY	J.H.YOUN	
FINISH White Chromate		SCALE	1/1	A4 DWG NO. DC00191-7/1 REVISION R SHEET 1 of 1
		UNIT	mm	