


1 2 3 4 5 6

A

B

C

D

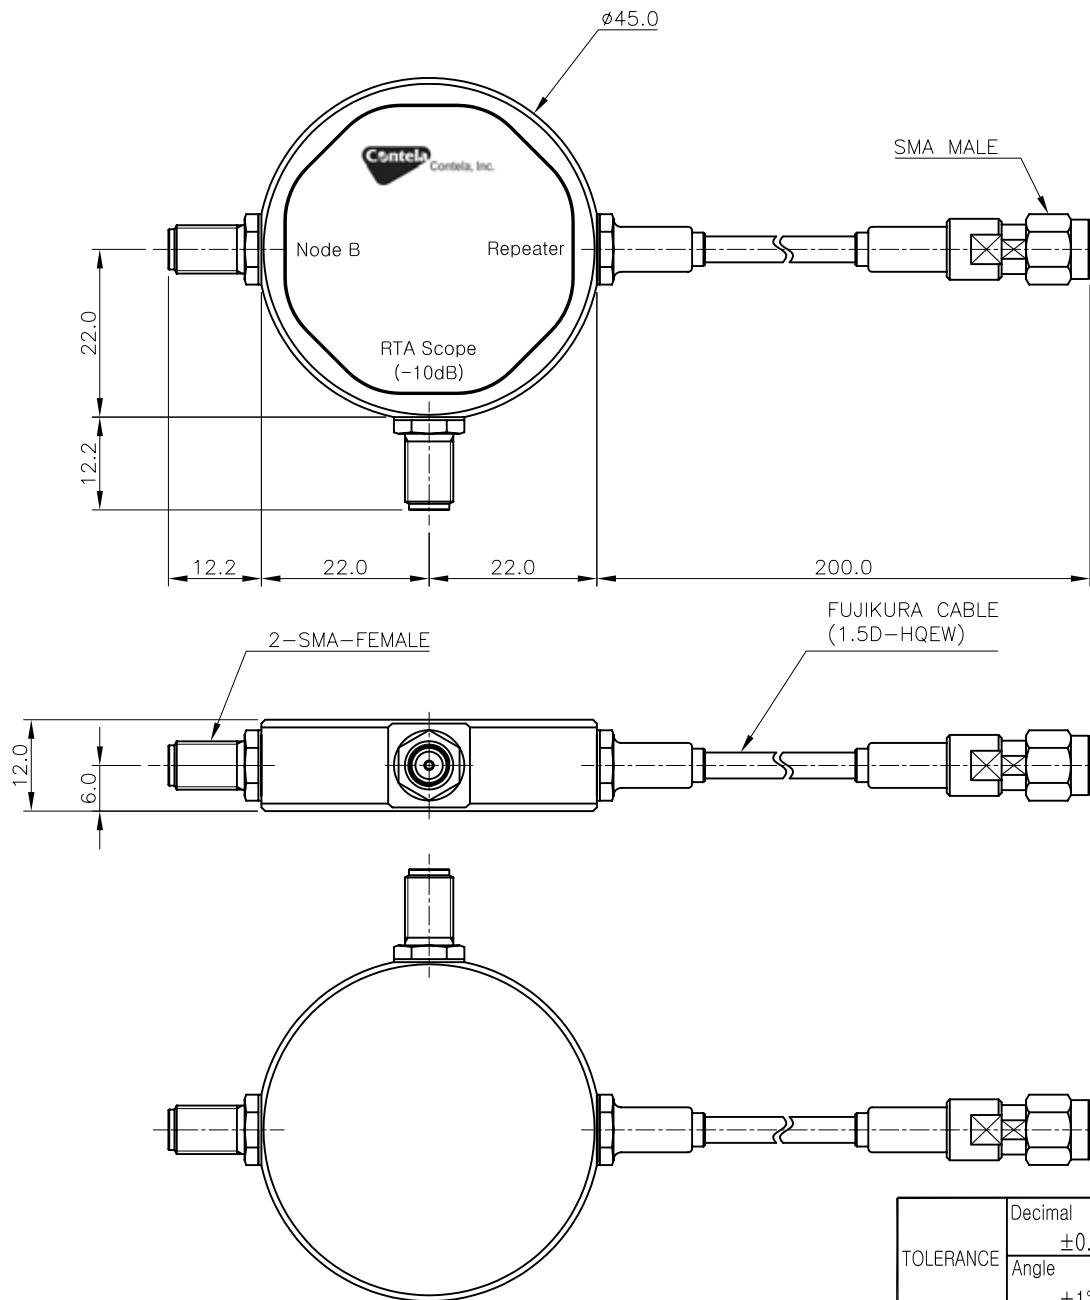

REVISION		
REV	DESCRIPTION	DATE
IR	Initial Revision	2009.07.20.
A	SILK 인쇄에서 LABEL 부착으로 변경	2009.08.03.

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1920~1980MHz
Coupling Value : 10.5 ± 1.0 dB
Insertion Loss (Max.) : 1.3dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 10W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6
CONNECTORS : MBsBD (Gold Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* DETAIL LABEL
Text Font & Size : 굴림, (H=1.8mm)
Color : PANTONE 420C(1도 인쇄)
Quality : PC0254T(BLACK)

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	± 0.3	2009. 8. 3.				
	Angle	APPROVED BY J.H.YOUN				
MATERIAL	$\pm 1^\circ$	CHECKED BY M.H.LEE			TITLE 10dB Single Coupler	
	A6061 T6	DRAWN BY K.I.CHO				
	FINISH Power Black Texture	SCALE 1/1	UNIT mm			
A4				DWG NO. DC00196-7/2		
				REVISION A	SHEET 1 of 1	

1 2 3 4 5 6