


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.07.22.

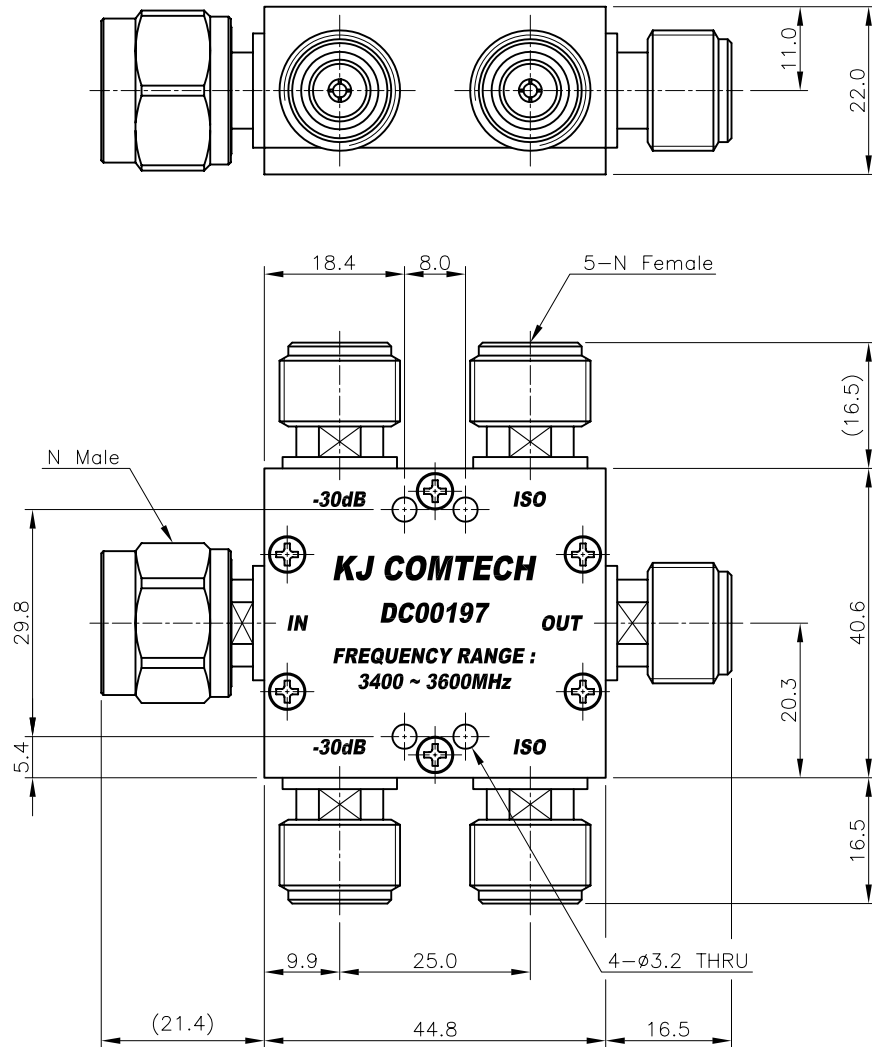

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 3400.0 ~ 3600.0MHz
 Coupling Value : 30.0±0.5dB
 Insertion Loss (Max.) : 0.3dB
 V.S.W.R (Max.) : 1.2 : 1
 Directivity (Min.) : 20.0dB
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2009. 07. 22.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	S.W.LEE	
MATERIAL	±1°	CHECKED BY	J.H.YOUN	TITLE 30dB Directional Coupler
	A6061 T6	DRAWN BY	K.I.CHO	
FINISH	White Chromate	SCALE	UNIT	DWG NO. DC00197-7/1 REVISION I R SHEET 1 of 1
		1/1	mm	

A4