
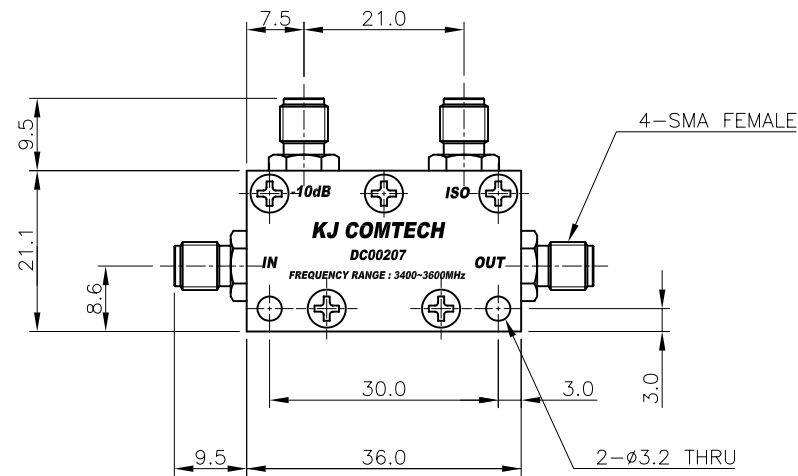


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Revision	2010.03.15.



* ELECTRICAL SPECIFICATIONS
Frequency Range : 3400.0 ~ 3600.0MHz
Coupling Value : 10dB±0.5dB
Insertion Loss (Max.) : 0.7dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 50.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2010. 3. 15.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	±1°	CHECKED BY		TITLE 10dB SINGLE COUPLER
	A6061 T6	DRAWN BY	K.I.CHO	
FINISH	White Chromate	SCALE	1/1	DWG NO. DC00207-7/1
		UNIT	mm	REVISION I R
				SHEET 1 of 1