
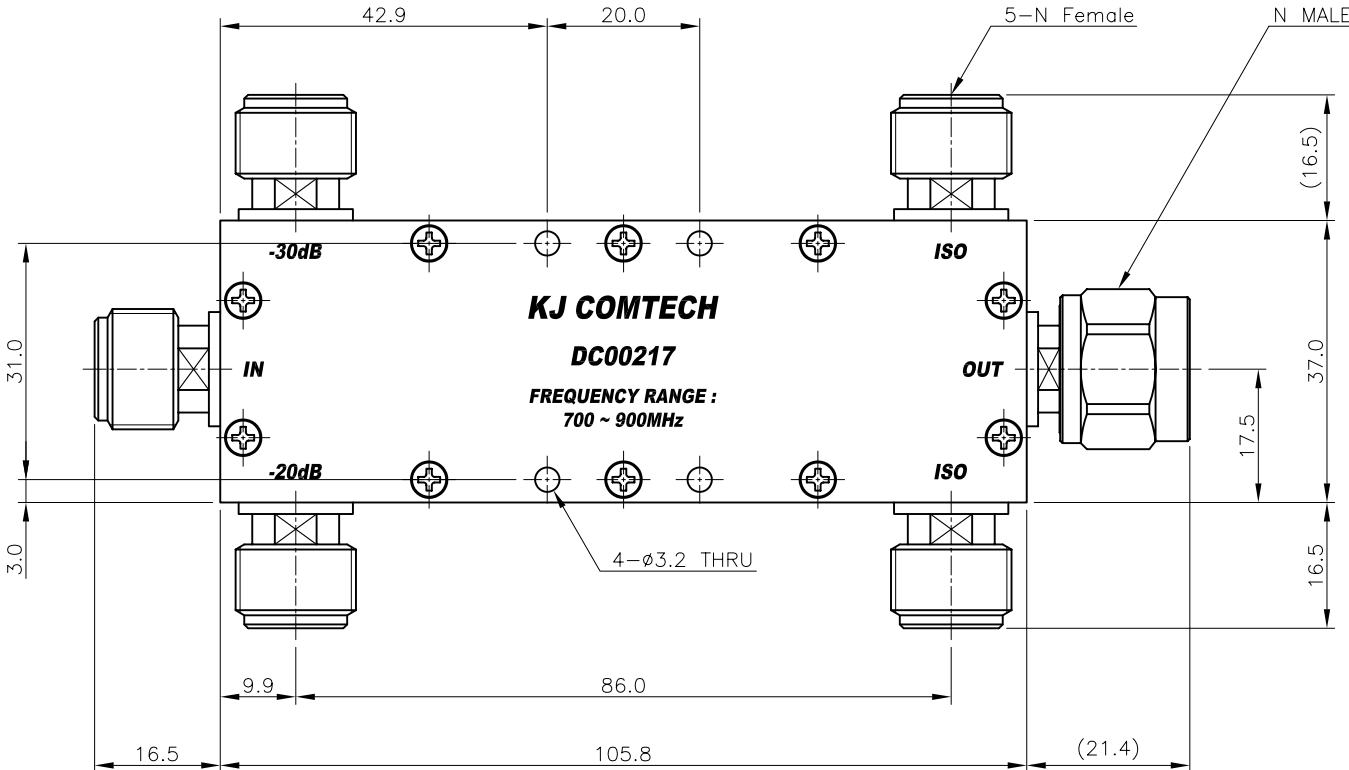


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	K.I.CHO	J.H.YOUN	2010.09.02.

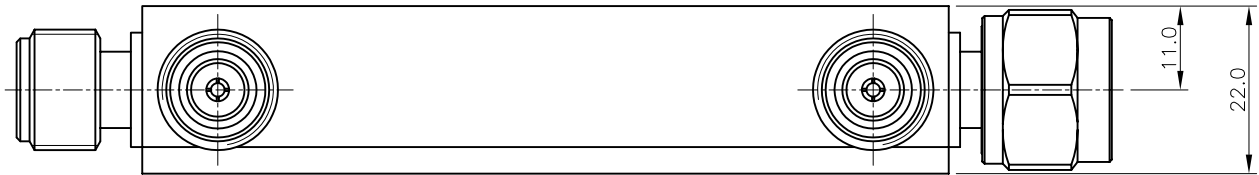

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 700.0 ~ 900.0MHz
 Coupling Value : 20dB±0.5dB, 30dB±0.5dB
 Insertion Loss (Max.) : 0.3dB
 V.S.W.R (Max.) : 1.2 : 1
 Directivity (Min.) : 20.0dB
 Power Handling (Max.) : 100.0W
 Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2010. 09. 02.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	±1°	CHECKED BY		TITLE 20/30dB Directional Coupler
	A6061 T6	DRAWN BY	K.I.CHO	
FINISH	White Chromate	SCALE	1/1	DWG NO. DC00217-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	

