REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	K.I.CHO	J.H.YOUN	2010.10.07.

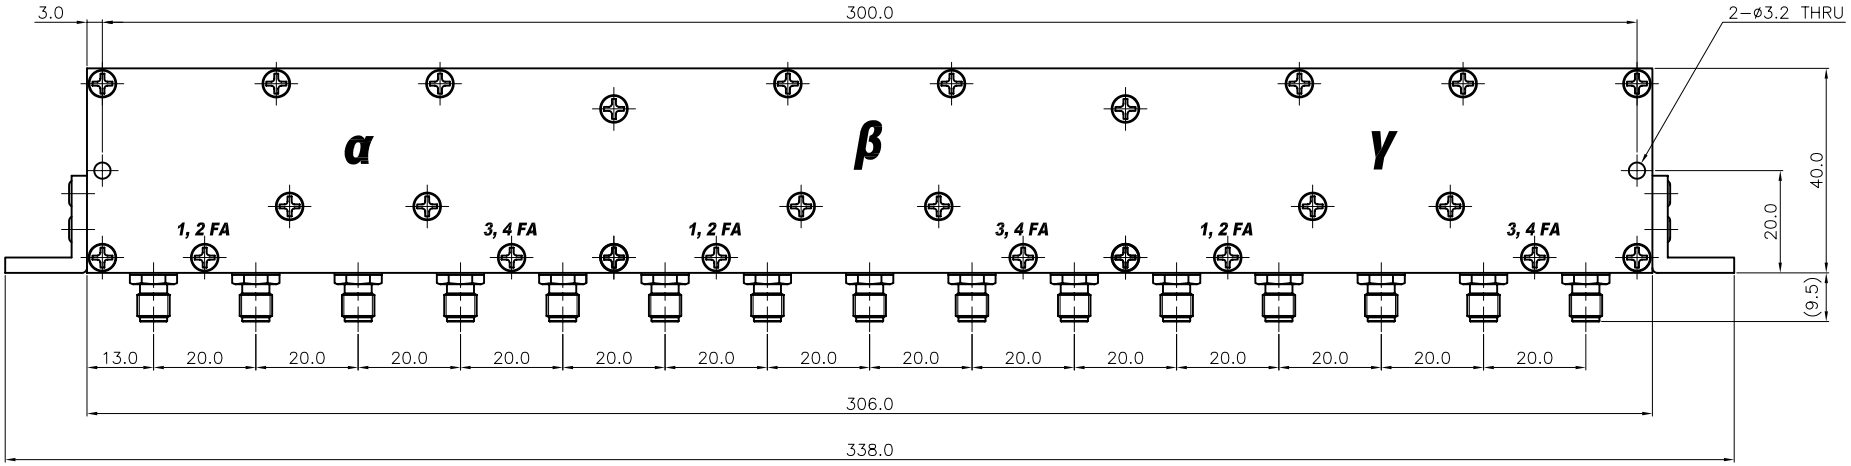

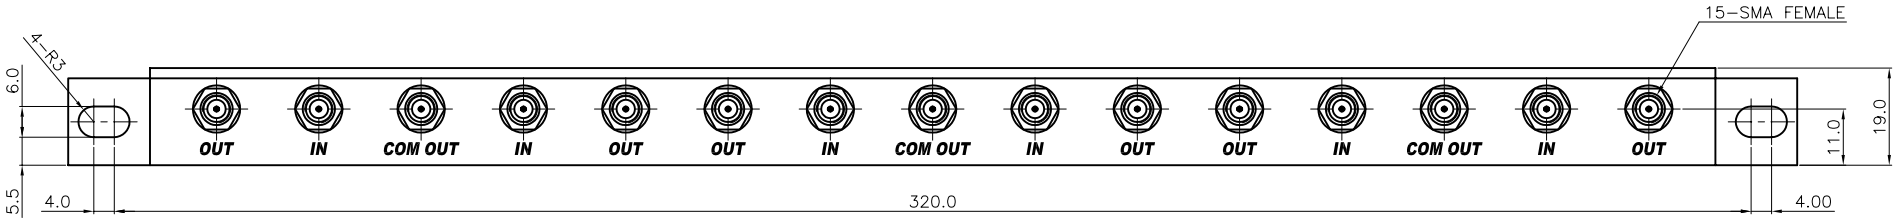

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1920.0 ~ 2170.0MHz
IN-OUT Insertion Loss (Max.) : 0.8dB
IN-COM OUT Insertion Loss (Max.) : 13.5dB
IN, OUT, COM OUT Return Loss (Min.) : 17.0dB
OUT-COM OUT Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE 2010. 10. 07.	KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY J.H.YOUN		
		CHECKED BY	TITLE 5,6FA 6섹터 구축용 결합기	
MATERIAL A6061 T6		DRAWN BY K.I.CHO	A3	DWG NO. DC00221-7/1
FINISH White Chromate		SCALE 1/1 UNIT mm		REVISION I R SHEET 1 of 1