
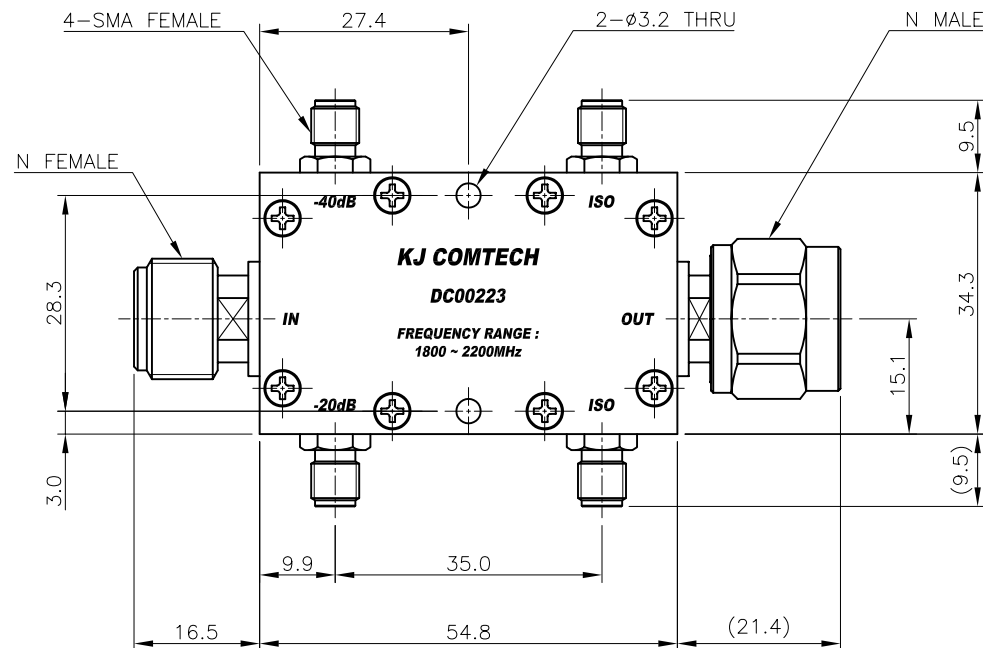


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	K.I.CHO	J.H.YOUN	2010.10.26.

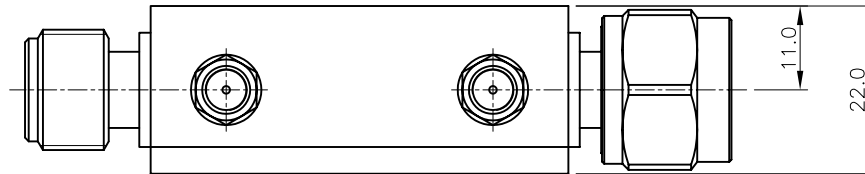

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1800.0 ~ 2200.0MHz
Coupling Value : 20.0±0.5dB / 40.0±0.5dB
Insertion Loss (Max.) : 0.3dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 20.0dB
Power Handling (Max.) : 100.0W
Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2010. 10. 26.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	±1°	CHECKED BY		KJ COMTECH CO.,LTD. TITLE 20/40dB Dual Coupler
	A6061 T6	DRAWN BY	K.I.CHO	
FINISH	White Chromate	SCALE	1/1	A4 DWG NO. DC00223-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	