


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
△	Initial Registration	I.C.KIM	J.H.YOUN	2012.02.16.
△				

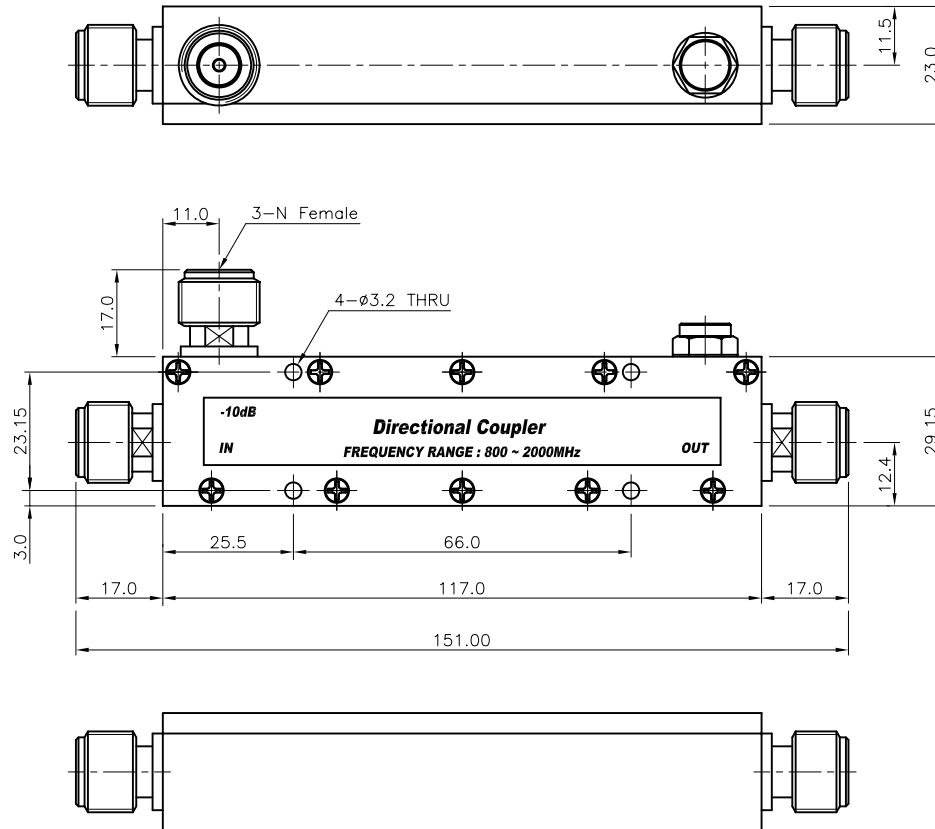

* ELECTRICAL SPECIFICATIONS

Frequency Range : 800.0 ~ 2200.0MHz
Coupling Value : 10dB $\pm$ 1.2dB
Insertion Loss (Max.) : 1.2dB
V.S.W.R (Max.) : 1.2 : 1
Directivity (Min.) : 18.0dB
Power Handling (Max.) : 20.0W
Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE 2012. 2. 16.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	Angle ±1°	APPROVED BY J.H.YOUN				
MATERIAL A6061 T6	FINISH White Chromate	CHECKED BY I.C.KIM	TITLE 10dB Directional Coupler			
		DRAWN BY J.H.YOUN				
SCALE 1/1		UNIT mm		A3	DWG NO. REVISION	DC00233-7/1 1