


▪ Arrestor Coupler DC00237-6/1 (824~884MHz)


1. RF MEASUREMENT DATA

1) SAMPLE 1

TR1 : RRU PORT VSWR, TR2: ANT PORT VSWR, TR3; INSERTION LOSS

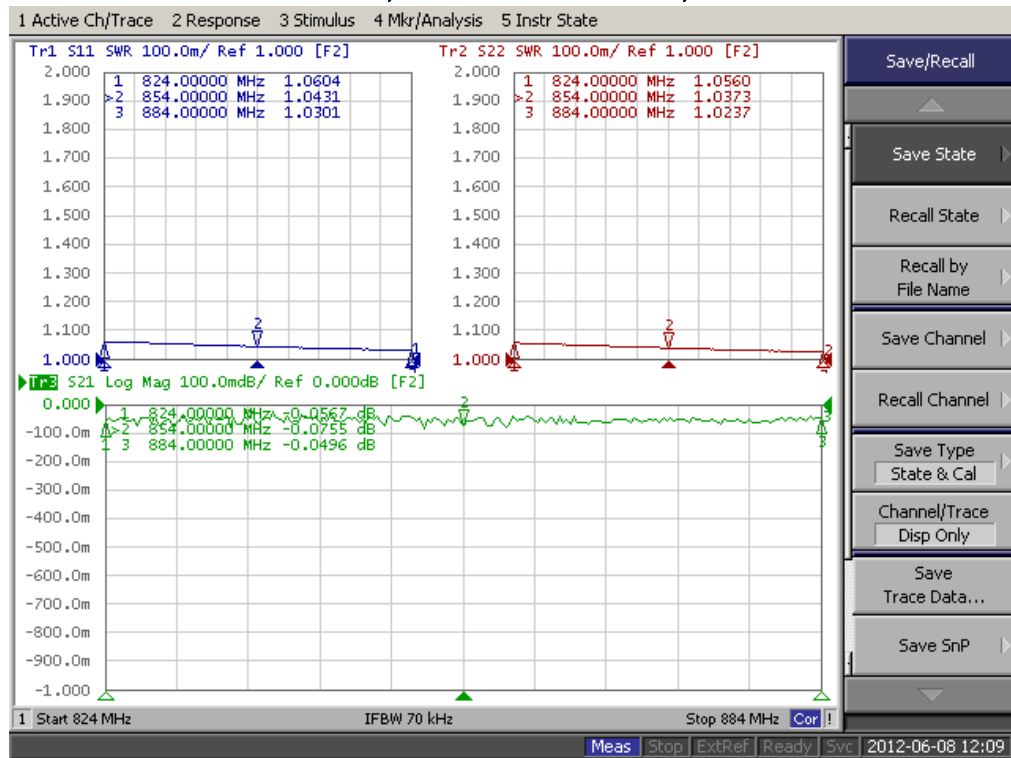


TR1 : RRU PORT VSWR, TR2: TX CPL PORT VSWR, TR3; COUPLING VALUE

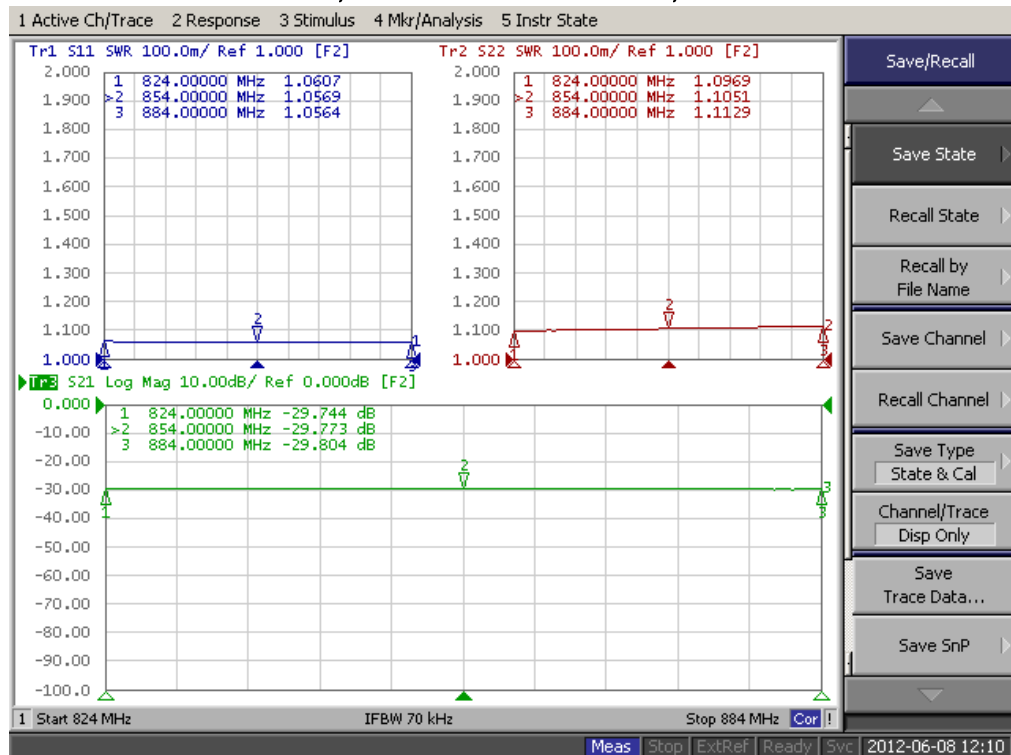


▪ Arrestor Coupler DC00237-6/1 (824~884MHz)


TR1 : RRU PORT VSWR, TR2: TX CPL PORT VSWR, TR3; ISOLATION VALUE

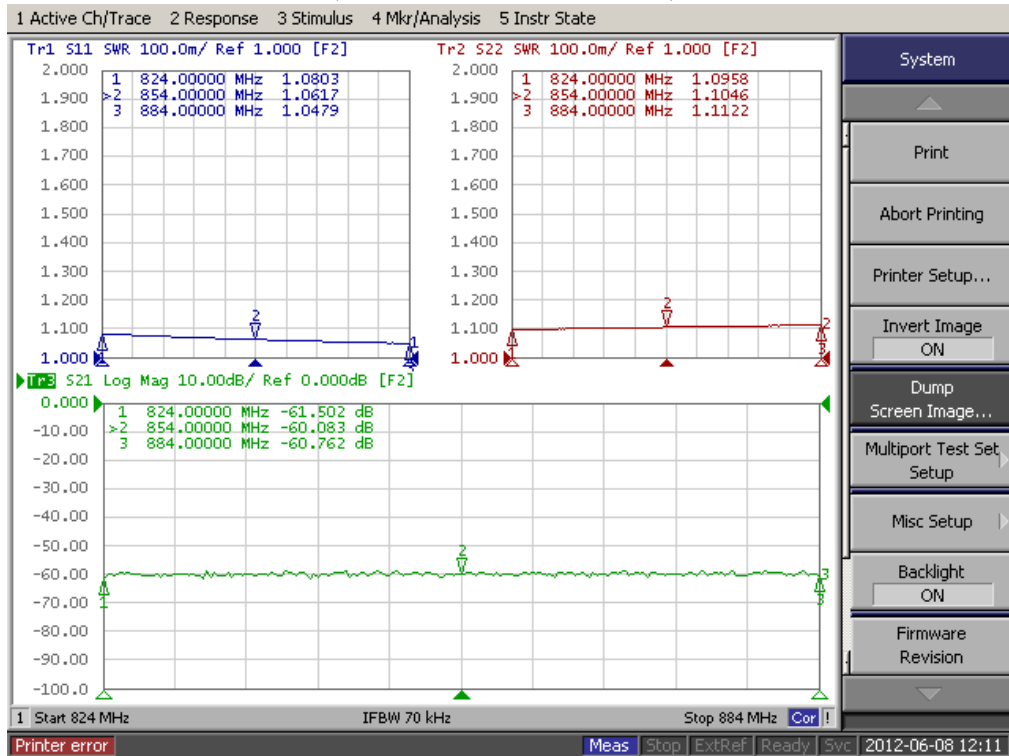

PIMD

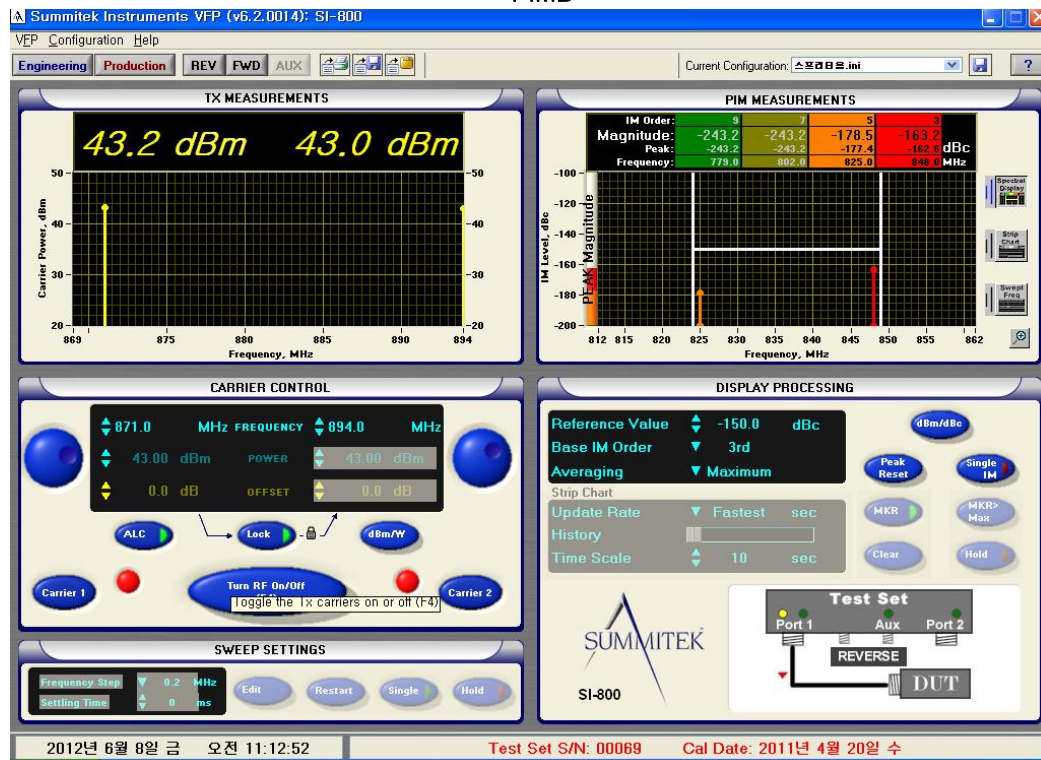


▪ Arrestor Coupler DC00237-6/1 (824~884MHz)

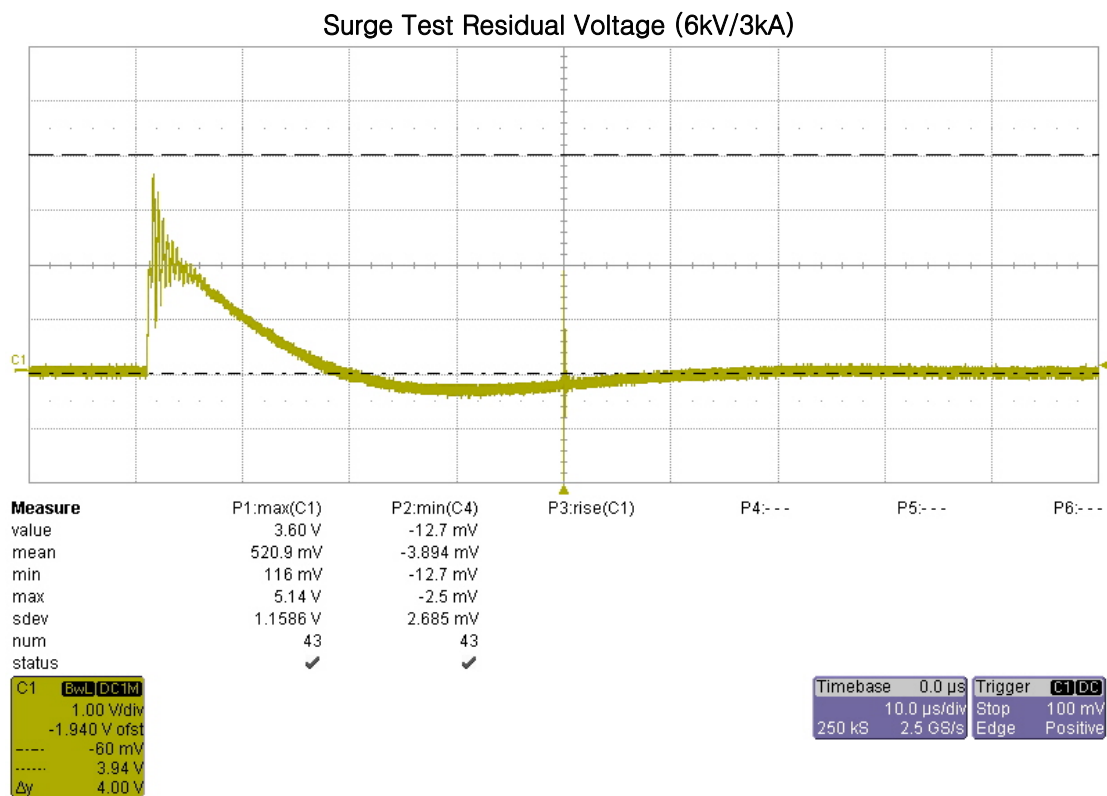


▪ Arrestor Coupler DC00237-6/1 (824~884MHz)

2) SAMPLE 2


TR1 : RRU PORT VSWR, TR2: ANT PORT VSWR, TR3; INSERTION LOSS

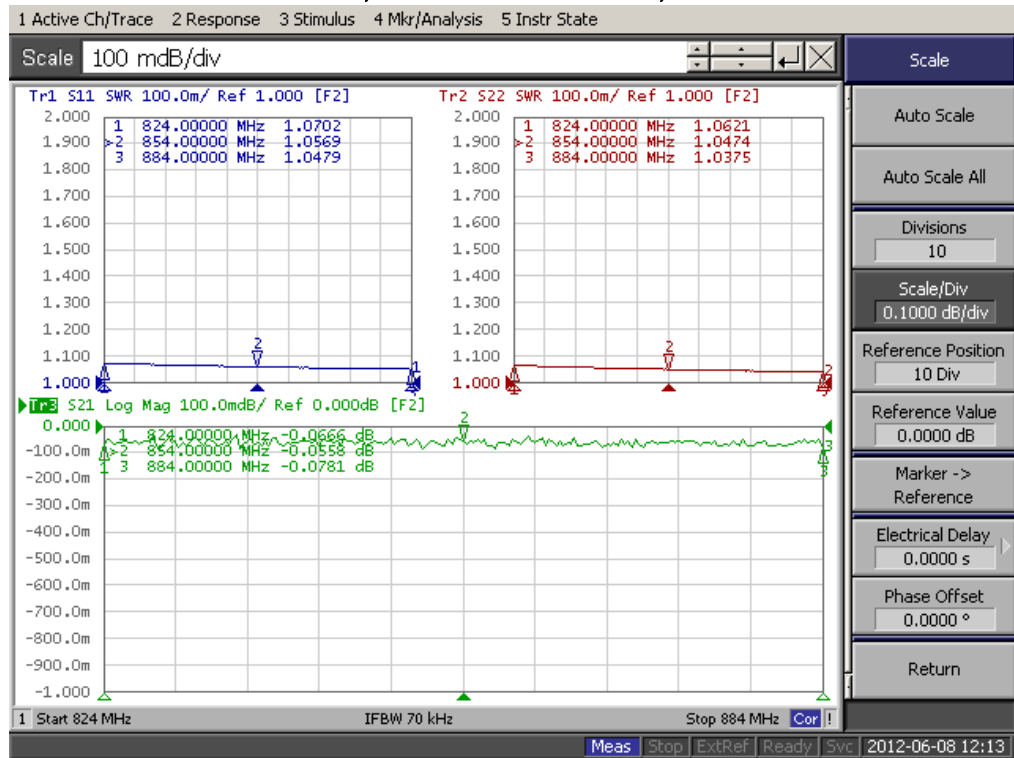


TR1 : RRU PORT VSWR, TR2: TX CPL PORT VSWR, TR3; COUPLING VALUE

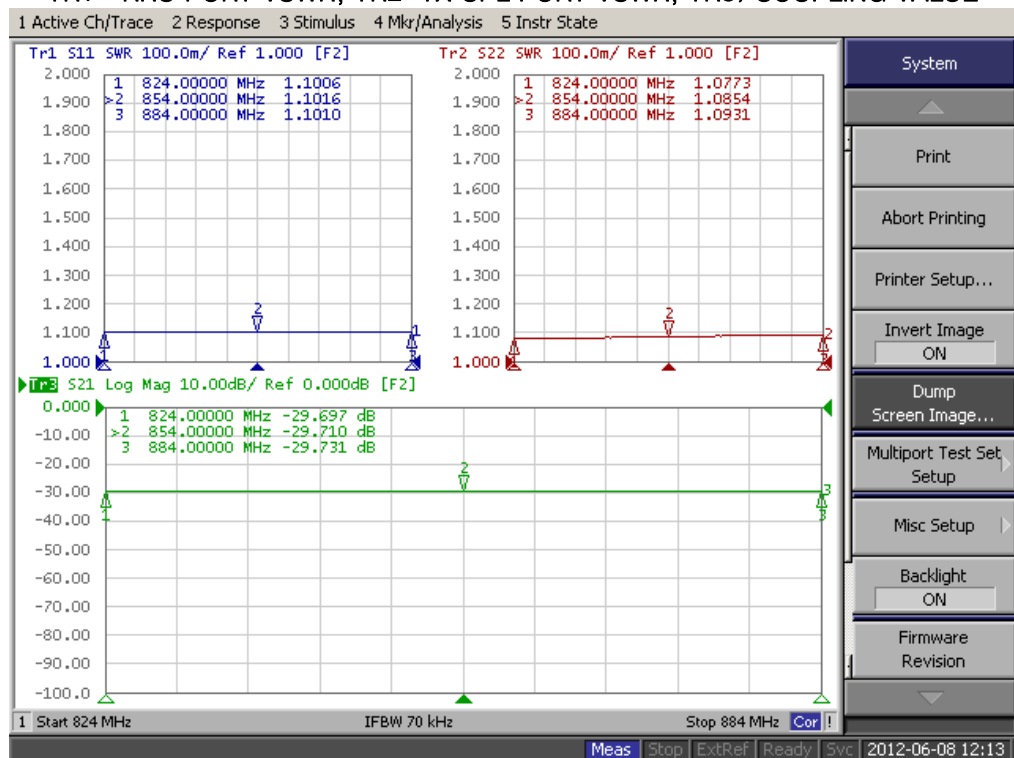

▪ Arrestor Coupler DC00237-6/1 (824~884MHz)

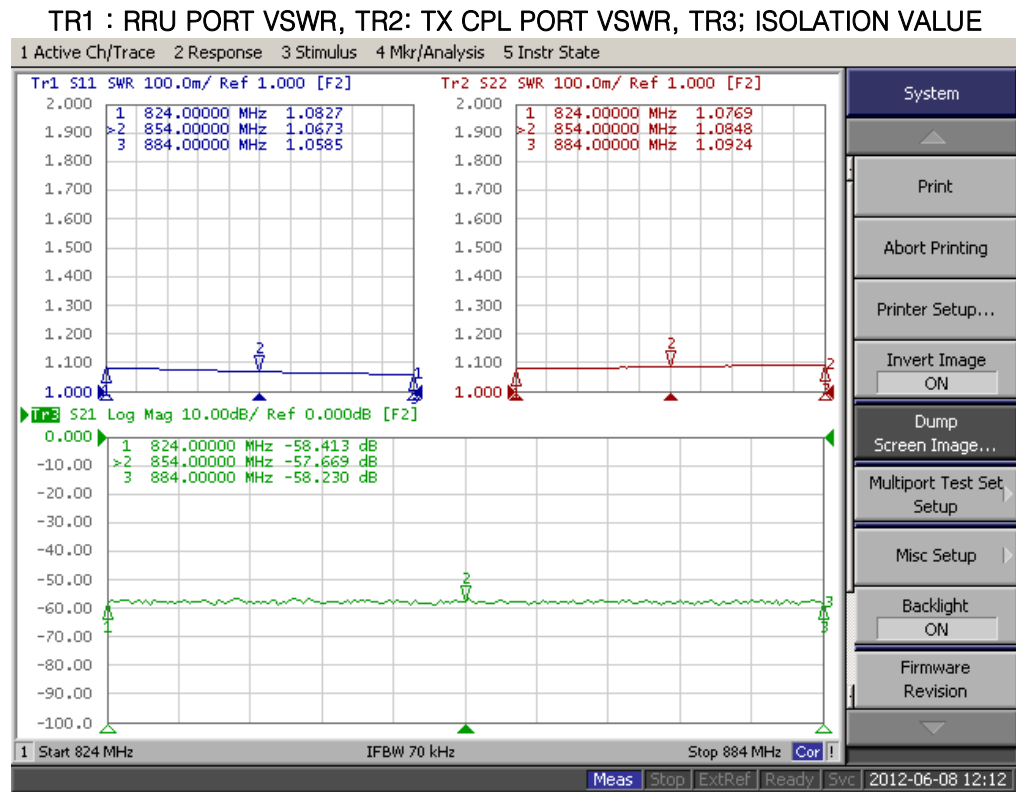

PIMD

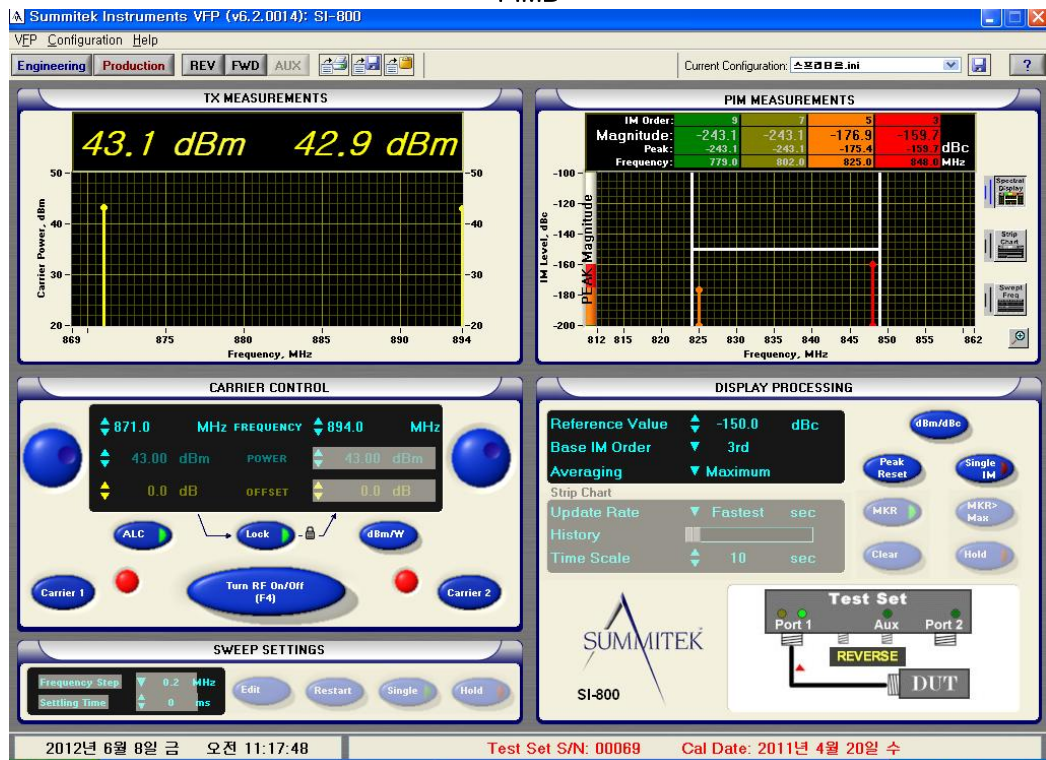

▪ Arrestor Coupler DC00237-6/1 (824~884MHz)

