


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	I.C.KIM	J.H.YOUN	2012.06.18.

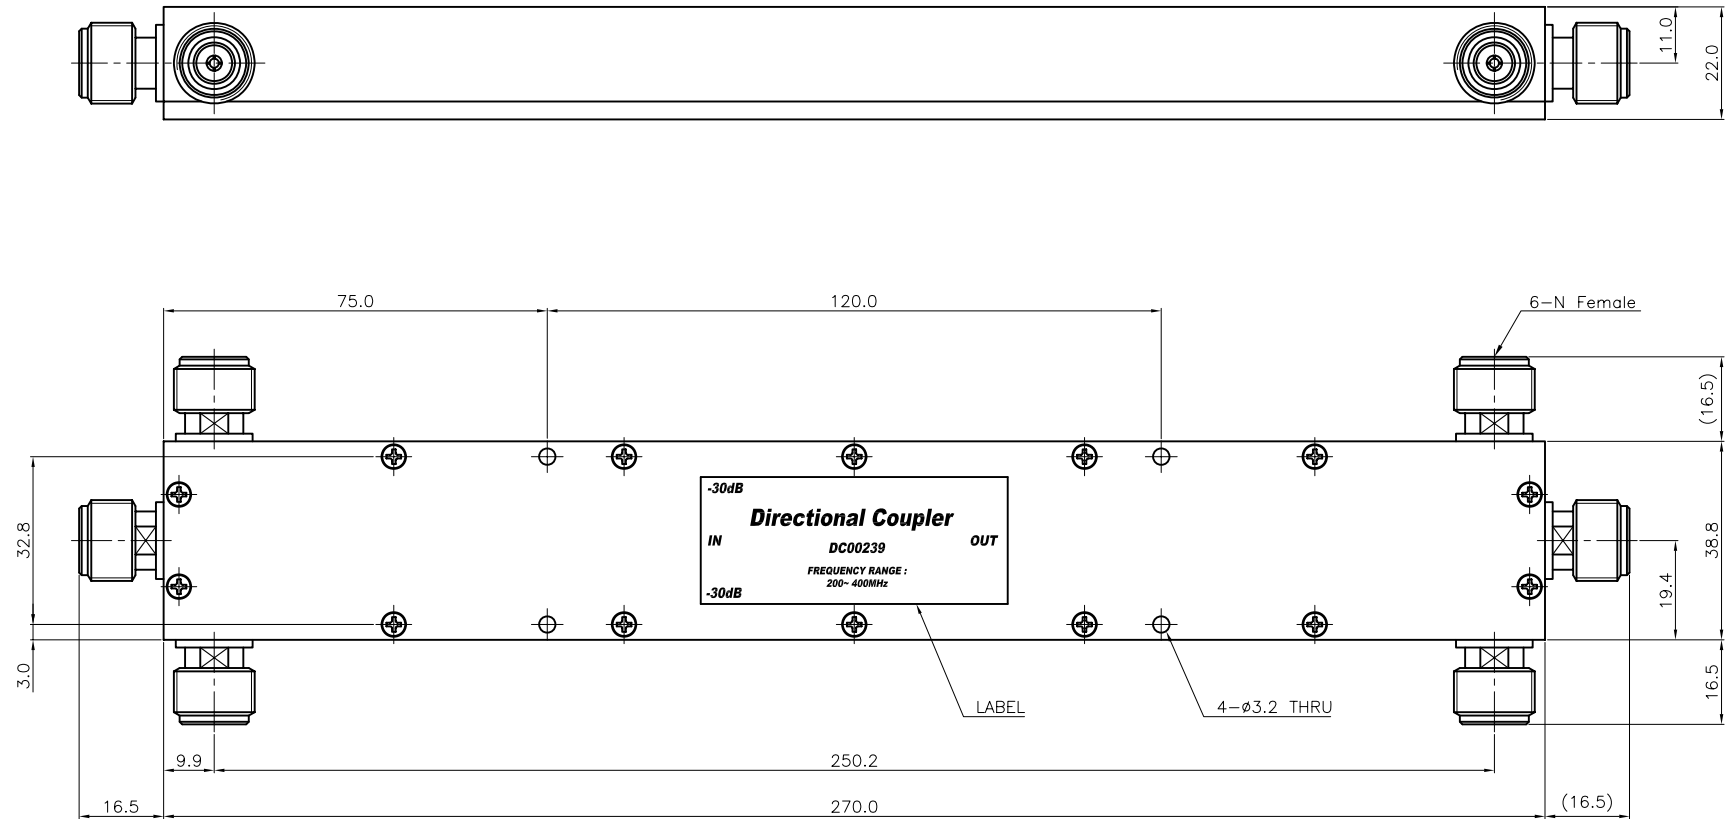

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 200.0~400.0 MHz
 Insertion Loss (Max.) : 0.5dB
 Coupling Value : 30 ± 1.0 dB
 Directivity (Min.) : 18dB
 Input V.S.W.R (Max.) : 1.3 : 1
 Power Handling (Max.) : 400.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : MBsBD (White Chromate Plate)
 CONNECTORS : MBsBD (Ni Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal	DATE		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle	APPROVED BY			
MATERIAL	$\pm 1^\circ$	CHECKED BY		TITLE 30dB Dual Coupler	
		DRAWN BY			
FINISH	SCALE	UNIT		A3	DWG NO.
		1/1			mm
				REVISION	1
				SHEET	1 of 1

KJ COMTECH
 RF & MICROWAVE TECHNOLOGY
 Tel : 82-32-347-8015
 Fax : 82-32-347-8017