
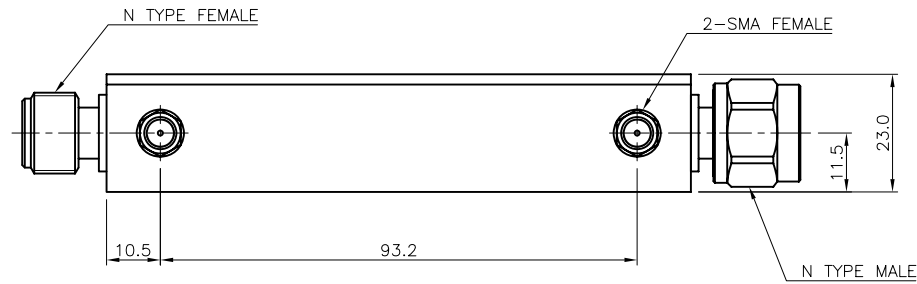


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2016.10.31.

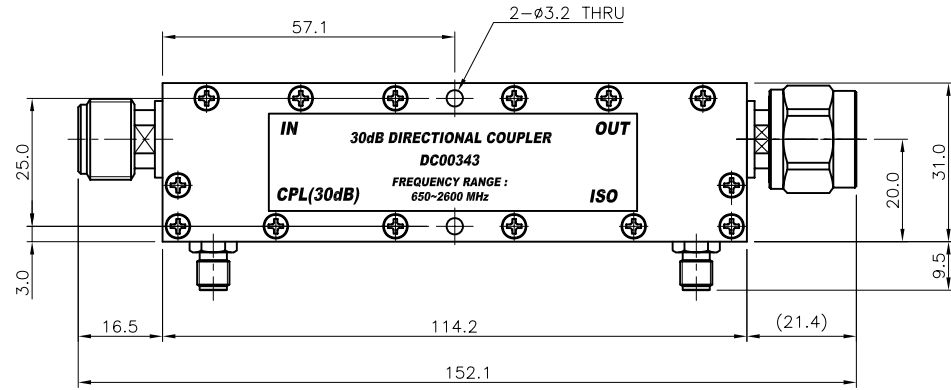

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 650~2600 MHz
 Insertion Loss (Max.) : 0.3 dB
 Coupling Value : 30.0 ± 1.0 dB
 V.S.W.R (Max.) : 1.3 : 1
 Isolation (Min.) : 48.0 dB (Directivity : 18dB Min.)
 Average Power Handling (Max.) : 1W
 Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
 Housing : A6061 T6 Connector : Nickel
 Connector pin : Beryllium Copper (Gold plate)

TOLERANCE	Decimal ±0.3	DATE 2016. 10. 31.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		TITLE 30dB COUPLER
	Angle ±1°	APPROVED BY J.H.YOUN			
MATERIAL A6061	FINISH 주기란 참조	CHECKED BY T.J.KIM	DWG NO. DC00343-7/1		
		DRAWN BY S.L.SON			
SCALE 1/1		UNIT mm	A3	DWG NO. DC00343-7/1	SHEET 1 of 1
				REVISION 1	