
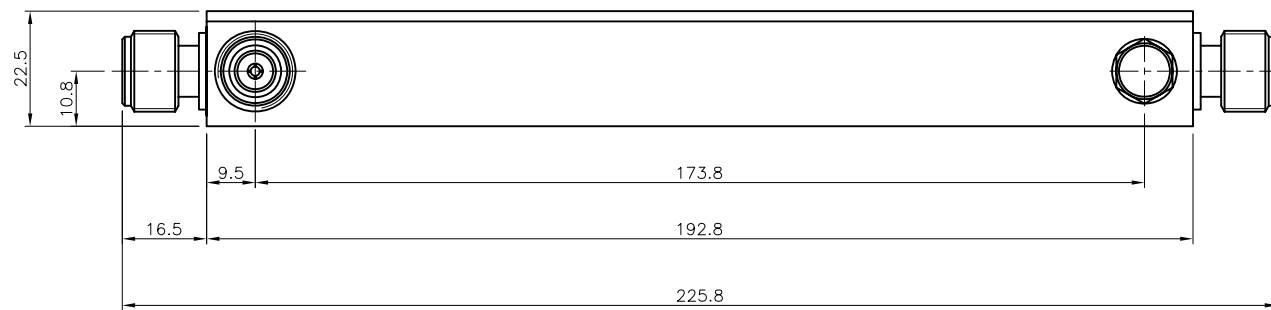


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2017.07.19.

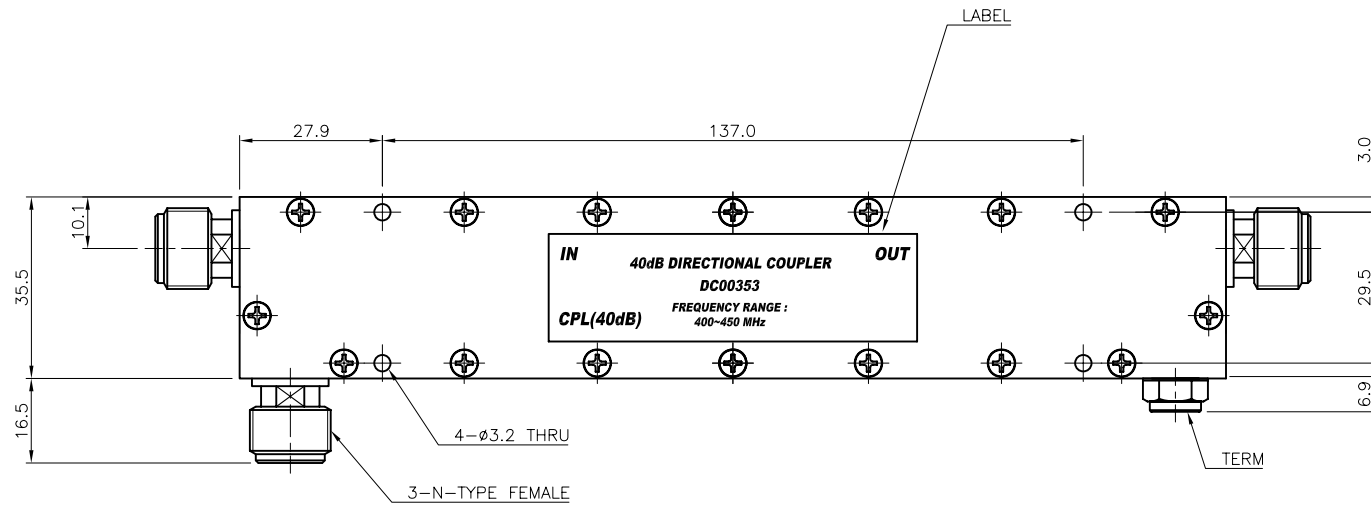

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 400~450 MHz
 Insertion Loss (Max.) : 0.2 dB
 Coupling Value : 40 ± 2.0 dB
 Return Loss (Max.) : 20dB
 Directivity (Min.) : 20.0 dB
 Power Handling (Max.) : 50W
 Impedance : 50 Ω

* ENVIRONMENTAL SPECIFICATIONS
 Operating temperature : -20 ~ +70 °C

* MECHANICAL SPECIFICATIONS
 Housing : A6061 T6 (White Chromate)
 Connector : MBsBD (Nickel Plate)
 Connector pin : Beryllium Copper (Silver plate)

TOLERANCE	Decimal ± 0.3	DATE	2017. 07. 19.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^\circ$	APPROVED BY	J.H.YOUN	
MATERIAL	A6061	CHECKED BY	T.J.KIM	TITLE 40dB COUPLER
		DRAWN BY	S.L.SON	
FINISH	주기란 참조	SCALE	1/1	DWG NO. DC00353-7/1
UNIT mm				REVISION 1
A3				SHEET 1 of 1