
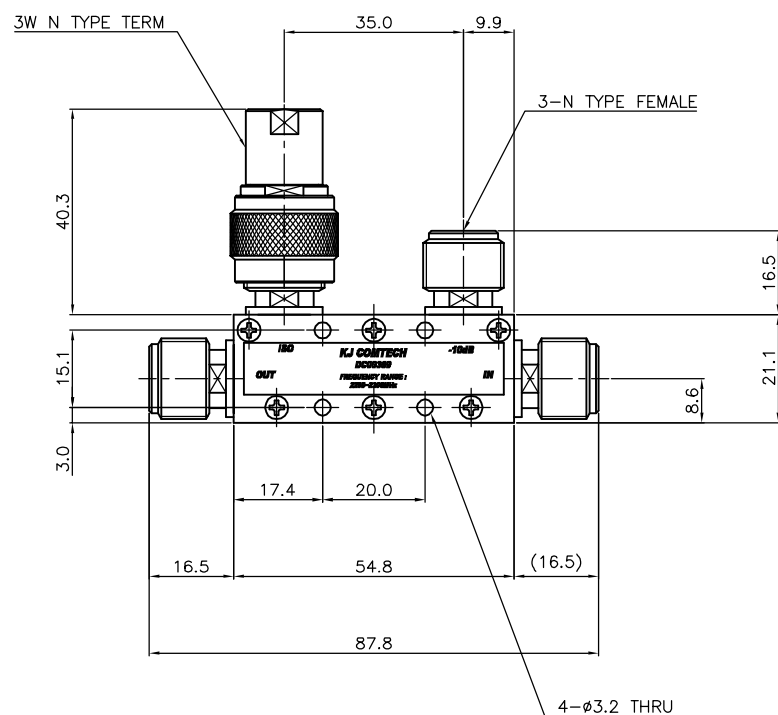
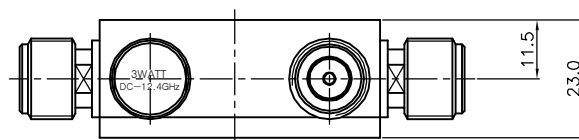


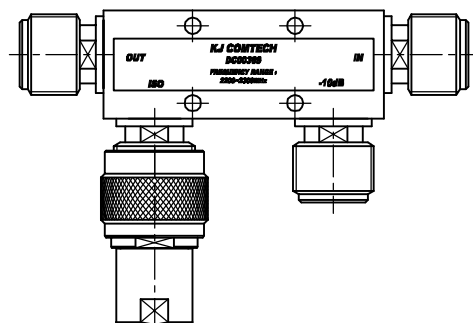

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2018.08.29.

* ELECTRICAL SPECIFICATIONS

Frequency Range : 2200.0 ~ 2300.0MHz

Coupling Value : 10dB $\pm$ 0.5dB

Insertion Loss (Max.) : 0.7dB

V.S.W.R (Max.) : 1.2 : 1

Directivity (Min.) : 20.0dB

Impedance : 50 Ω

Handling Power : 100W


* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal ±0.1	DATE 2018. 8. 29.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY J.H.YOUN			
MATERIAL A6061 T6	FINISH White Chromate	CHECKED BY	TITLE 10dB Directional Coupler		
		DRAWN BY S.L.SON			
SCALE 1/1		UNIT mm	 A3	DWG NO. DC00369-7/1	
		REVISION 1		SHEET 1 of 1	