
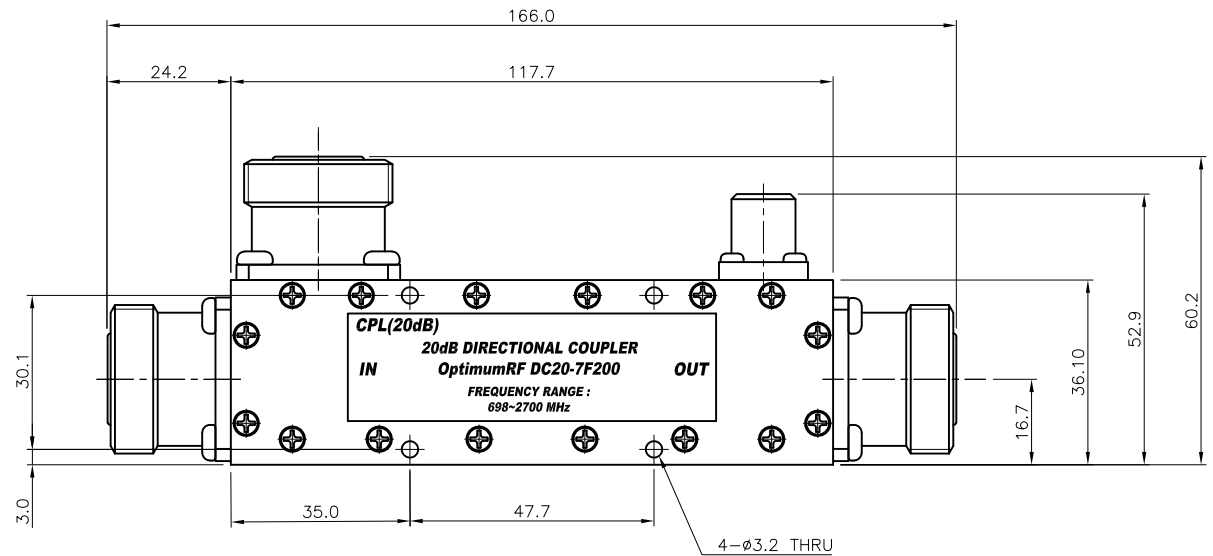


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2022.09.20.
2				

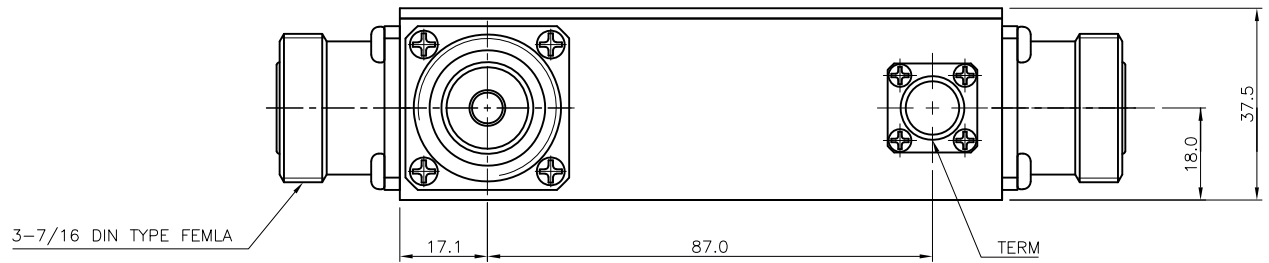

- * ELECTRICAL SPECIFICATIONS
Frequency Range : 698~2700 MHz
Insertion Loss (Max.) : 0.4 dB
Coupling Value : 20.0 ± 1.2 dB
V.S.W.R (Max.) : 1.23 : 1
Directivity : 20dB Min.
Average Power Handling (Max.) : 200W
PIMD : -153dBc(@43dBm 2 Tone)
Impedance : 50 Ω
- * ENVIRONMENTAL SPECIFICATIONS
Operating temperature : -40 ~ +85℃
Environmental Class : IP67
- * MECHANICAL SPECIFICATIONS
Housing : A6061 T6 (DIC-547 Texture)
Connector : MBsBD (SUCO)
Connector pin : Beryllium Copper (Silver plate)

TOLERANCE	Decimal ±0.3	DATE	2022. 09. 20.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	S.L.SON	
MATERIAL	A6061	CHECKED BY	S.L.SON	TITLE 20dB COUPLER
		DRAWN BY	K.S.KIM	
FINISH	DIC-547	SCALE	1/1	DWG NO. DC00373-6/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	