


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2022.11.21.
2				

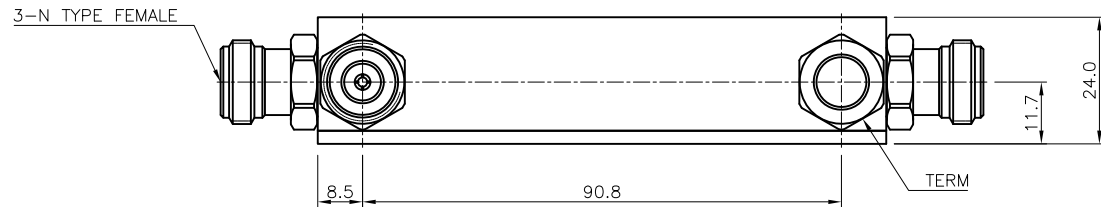


* ELECTRICAL SPECIFICATIONS

Frequency Range : 800~4000 MHz
Insertion Loss (Max.) : 0.8 dB
Coupling Value : 10.0 ± 1.3 dB
V.S.W.R (Max.) : 1.25 : 1
Isolation (Min.) : 30dB
Average Power Handling (Max.) : 200W
Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS

Housing : A6061 T6 (White Chromate)
Connector : MBsBD (Nickel Plate)
Connector pin : Beryllium Copper (Silver plate)

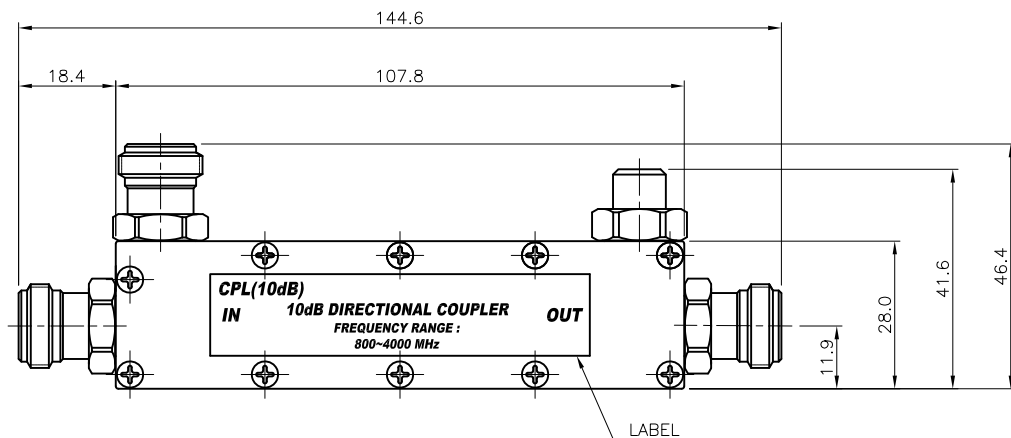

TOLERANCE	Decimal	DATE	2022. 11. 22.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	TITLE	10dB COUPLER
	Angle	APPROVED BY	S.L.SON			
MATERIAL	±1°	CHECKED BY	S.L.SON	DRAWN BY	K.S.KIM	DWG NO. DC00374-N/1
	A6061					
FINISH	White Chromate	SCALE	1/1	UNIT	mm	REVISION 1
						SHEET 1 of 1