


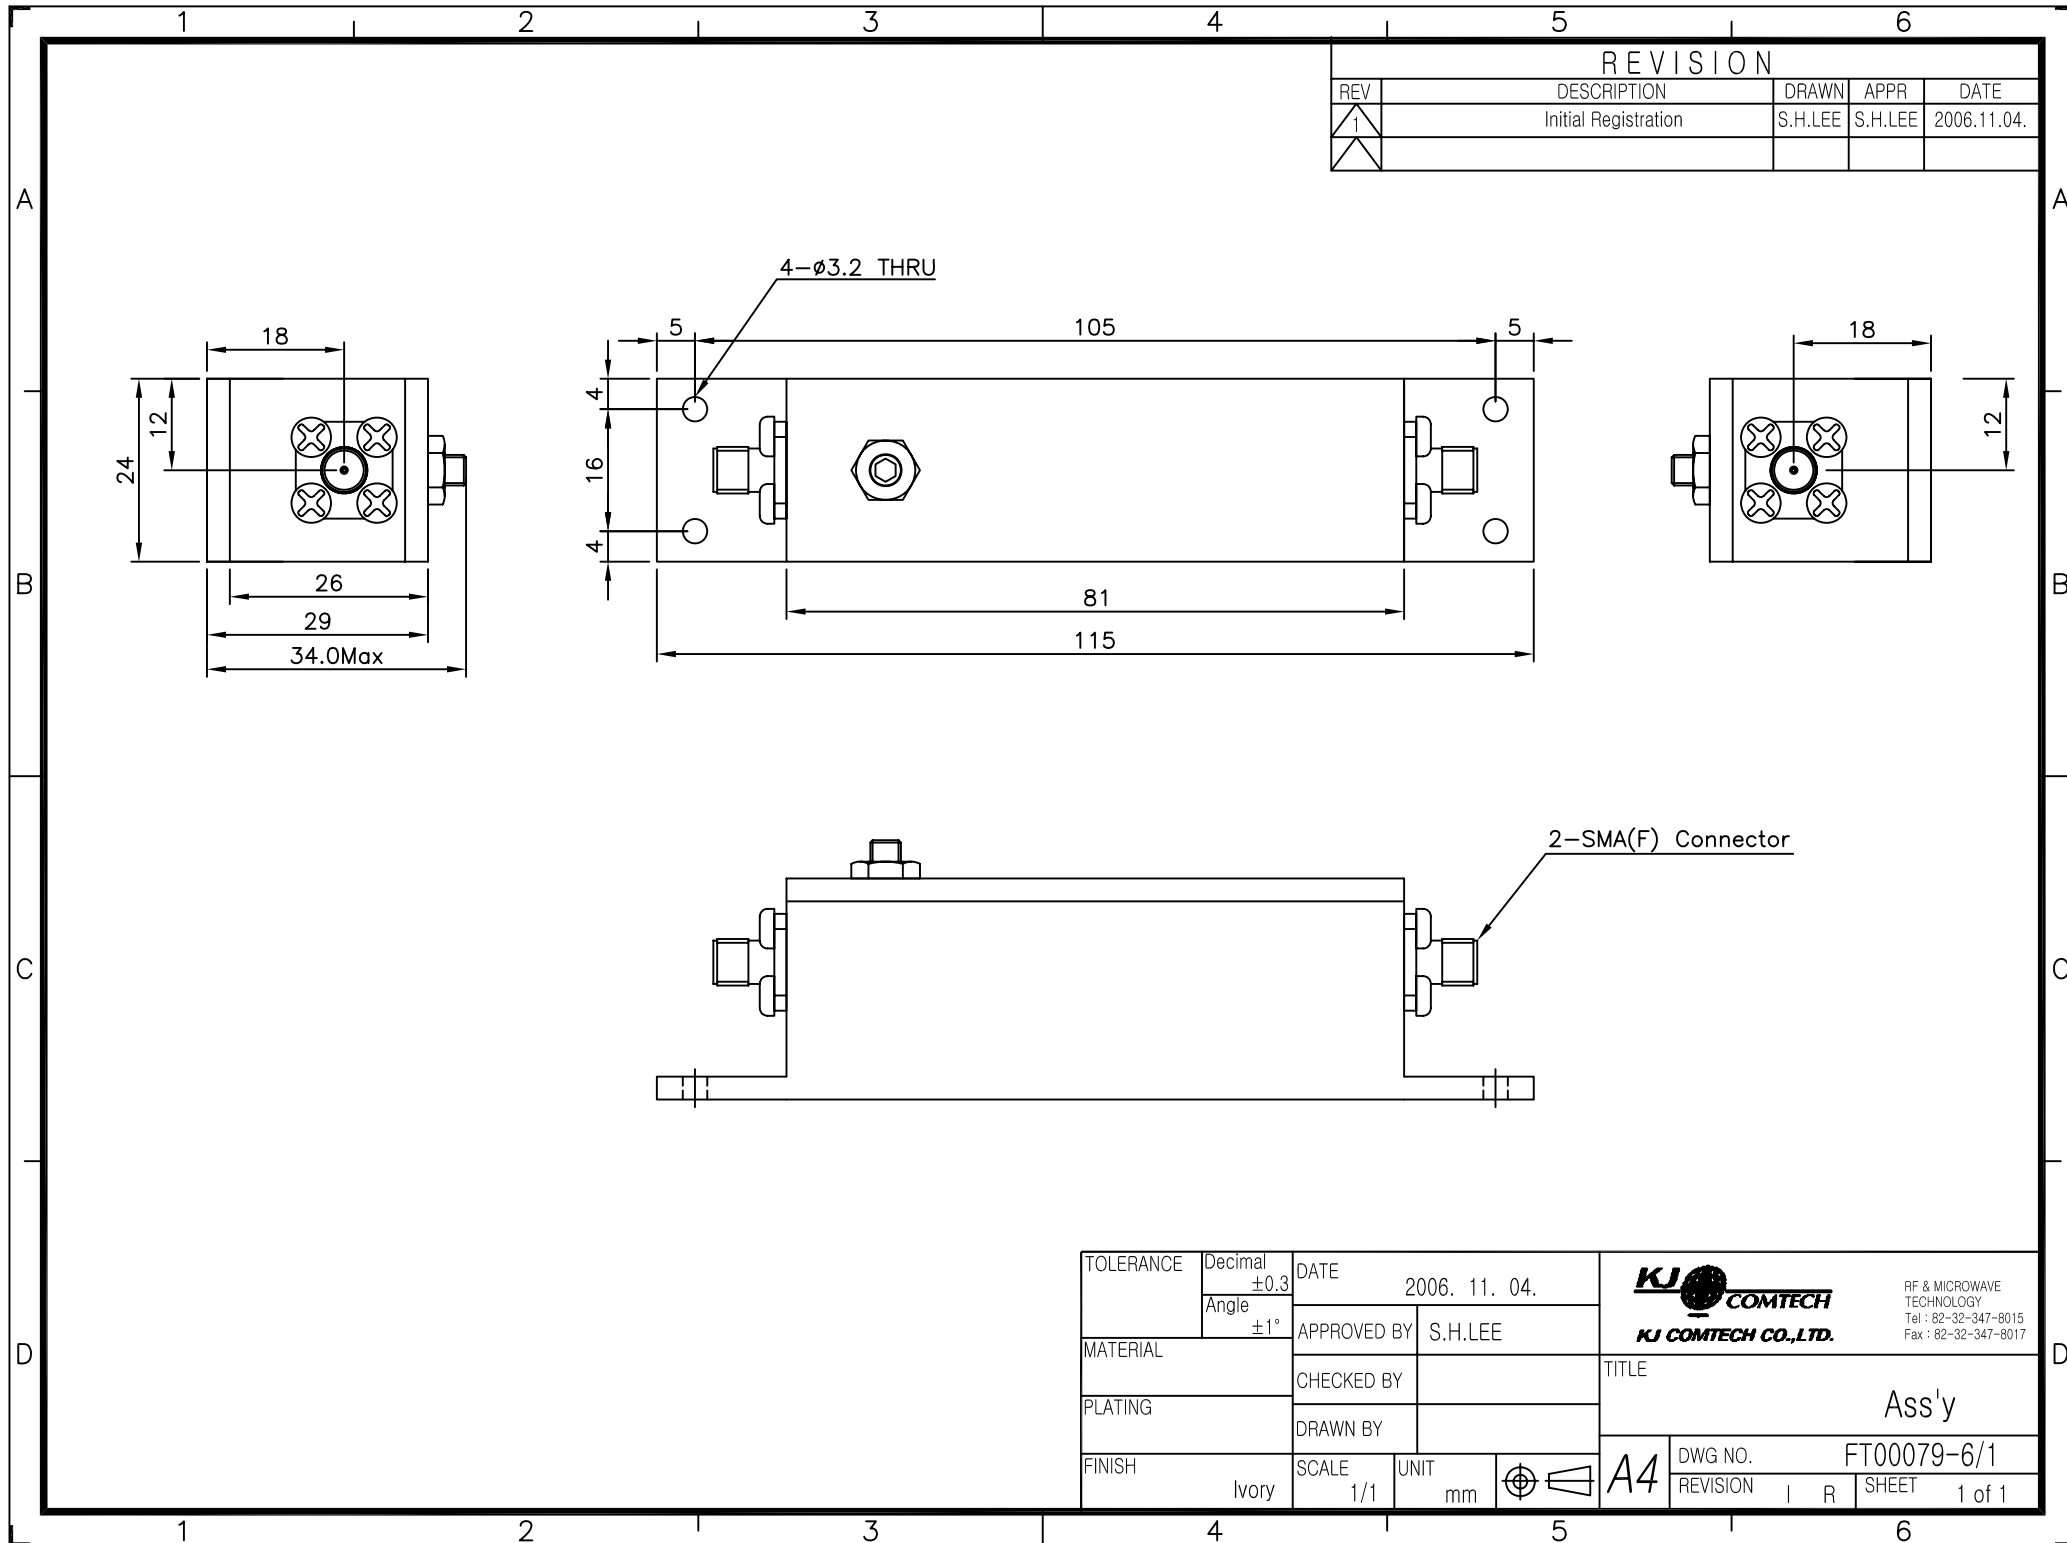

1. Electrical & Mechanical Specification

Electrical Specifications	
Connector	SMA Type (F)
Frequency Range	1780~1805MHz (BW: 25MHz)
Insertion Loss	≤3dB
Ripple	≤2dB (p-p)
Return Loss	≥20dB
Isolation	≥60dB
Power Handling	1W
Impedance	50Ω
Mechanical Specifications	
Dimensions (mm)	24.0 x 115.0 x 29.0
Weight	≤0.5Kg
Operating Temperature	-20~+70 °C
Connector Finish	Tri-plate
Housing Finish	Ivory Coating